

Main Office
Golayee Wazirabad
PO Box 208
Kabul, Afghanistan
Phone: +93 202230752
Mobile: +93 700288232
E-mail: dacaar@dacaar.org
Website: www.dacaar.org

REQUEST FOR QUOTATION

Supply and Installation of Complete Solar Water Supply System for Dom Joy Village Sorkh Parsa District of Parwan Province

درخواست آفر برای تهیه و نصب واتر پمپ با سیستم انرژی آفتابی
در قریه دم جوی ولسوالی سرخ پارسا ولایت پروان

دفتر مرکزی
گولایی وزیرآباد
پست بکس ۲۰۸
کابل، افغانستان
تلفون: +۹۳۲۰۲۲۳۰۷۵۲
موبایل: +۹۳۷۰۰۲۸۸۲۳۲
ایمیل: dacaar@dacaar.org
وبسایت: www.dacaar.org

DACAAR RFQ 02 PRF-12/DANIDA/2307-ROIE/ROIE1.9/PRW-0307/01.2024

Date: January 04, 2024

DACAAR invites interested parties to submit their sealed offers for Supply and Installation of Complete Set of Solar Water Supply System with Fixed Stands and Water Pump in Dom Joy Village Sorkh Parsa District of Parwan Province as described in Annex (I).

Sealed offers must reach to DACAAR Main Office Logistics Unit located in Street No. 12, Paykobe-Naswar, Qalae-Fathullah, Kabul Province till 4:00pm January 15, 2024.

The bid opening session will be held on January 16, 2024 at 10:00am in DACAAR Main Office in Kabul Province and the bid winner will be notified shortly after the bid opening session.

Terms and Conditions for the bid winner/participants

1. Delivery and Installation of Solar Water Supply System is in Dom Joy Village Sorkh Parsa District of Parwan Province as described in Annex (II).
2. Installation and Delivery of Solar pump and solar system should be carried out by the company technicians.
3. DACAAR technical staff at site will inspect the function of solar system water pump, before delivery and after installation in the targeted area.
4. The bidders have to provide solely information regarding the panels, panels stand and pump, Also, prepare all the lists of materials needed in this project and attach the design of the solar system to their offer. (e.g. name of manufacturer etc.). Pump daily output design is also needed; otherwise, the offer will not be accepted. However, the materials for this project is herein inlisted in Annex (I), the supplier still can provide their own list required as per their deliberation, as well as to provide desing for connecting the solar panels with main switch and inverter.

داکار از کمپنی های علاقمند و واجد شرایط که خواهش اشتراک در پروسه داوطلبی داکار را داشته باشند دعوت به عمل میآورد تا در داوطلبی برای تهیه و نصب سیت مکمل سولر غیر متحرک واتر پمپ زیر آبی مجهز با سیستم انرژی آفتابی در قریه دم جوی ولسوالی سرخ پارسا ولایت پروان اشتراک نمایند که تفصیلات آن در ضمیمه (I) تذکر یافته است.

آفرها باید الی تاریخ 15 جنوری 2024 ساعت 4:00 عصر به شعبه لوژستیک دفتر مرکزی داکار واقع پایکوب نساوار سرک 12 قلعه فتح الله ولایت کابل سپرده شود.

آفرگشایی ساعت 10:00 قبل از ظهر تاریخ 16 جنوری 2024 دفتر مرکزی داکار در ولایت کابل صورت میگیرد که متعاقباً برنده داوطلبی در اسرع وقت اطلاع خواهد یافت.

شرایط قرارداد برای برنده داوطلبی/ اشتراک کننده گان

1. انتقال و نصب سولر غیر متحرک واتر پمپ زیر آبی مجهز با سیستم انرژی آفتابی در قریه دم جوی ولسوالی سرخ پارسا ولایت پروان که در ضمیمه (II) ذکر گردیده صورت میگیرد.
2. انتقال و نصب سولر پمپ و سولر سیستم باید توسط اشخاص مسلکی شرکت صورت بگیرد.
3. پرسونل داکار نحوه کار سولر سیستم و واتر پمپ را قبل از انتقال و بعد از نصب کردن در ساحه مربوطه نظارت خواهند نمود.
4. داوطلبان مکلف اند تا معلومات (مشخصات) مکمل را در مورد پنل های سولر، انورتر دیجیتال یا مین سویچ عمومی و پمپ زیر آبی که توسط انرژی سولر کار میکند، آب دهی روزانه یا ساعتوار، و کمپنی ساخت پنل ها و پمپ ها را ارائه نمایند همچنان تمام لست مواد مورد ضرورت برای این پروژه لست شده است، ولی باز هم داوطلبان میتوانند که لست مواد مورد ضرورت این پروژه که اضافه ویا کمبود از لست داده شده باشد ضمیمه آفر خویش نمایند، همچنان لین دوانی شیشه های سولر همراي مین سویچ و انورتر را ترسیم و ضمیمه آفر خود نمایند در غیر آن آفر که معلومات فوق الذکر در آن گنجانیده نشده باشد، داکار از آن صرف نظر خواهد کرد.

5. The contractor must practically show total power (kw) generated by solar panels in proportion to the number of solar panels and submit DACAAR field colleague verified documents to DACAAR Main Office.
5. قرارداد گیرنده باید پاور مجموعی سیستم را نظر به تعداد شیشه های سولر عملاً نشان داده و اسناد آنرا که تصدیق انجنیر ساحوی داکار در آن موجود باشد، به دفتر داکار ارائه نماید.
6. Minimum three years' guarrenty of complete system is required after successfully installation of complete solar system and this fact must be clearly mentioned in the offer.
6. حد اقل معیاد تضمین و خدمات مکمل سیستم بعد از نصب تسلیمدهی مکمل سولر سیستم برای مدت سه سال میباشد، که این موضوع باید بشکل واضح و روشن در اسناد داوطلبی مشخص گردد.
7. 10% of total contract value will be seized as a service/ maintenance guarantee with DACAAR for three years. This amount will be refunded when the service/ maintenance guarantee period is successfully served.
7. 10% از مجموع ارزش قرارداد بطور ضمانت به مدت سه سال نزد داکار محفوظ میماند، و بعد از تکمیل مؤفقانه دوره ضمانت کار کرده گی سیستم این مبلغ به قرارداد گیرنده قابل پرداخت میباشد.
- If, the contractor is not responding during one week for the issue of system maintenance, then DACAAR reserves the rights to use the 10% guarantee to fix the system.
- اگر قرارداد گیرنده در طول یک هفته به موضوع ترمیم و نگهداری شبکه پاسخ ندهد، داکار حق استفاده از ضمانت 10 فیصد قید شده را برای ترمیم سیستم محفوظ میدارد.
8. In case of delay without logical reasons in delivery and installation of Solar System 0.5% of total cost of undelivered items/ incomplete work will be charged as penalty for each official day of delay.
8. در صورت تأخیر رساندن سیستم ها بدون عذر موجه در وقت معینه آن، مبلغ 0.5 فیصد از ارزش اموال/کار تأخیر شده به طور جرمانه در برابر هر روز رسمی تأخیر از طرف قراردادی تأدیه خواهد گردید.
9. Prices shall be given in Afghani (AFN) and shall include transport plus loading, unloading and complete installation of the system in targeted areas. Offers without sign and stamp will not accepted.
9. قیمت ها باید به افغانی داده شود و شامل قیمت (مالیه دولتی، انتقال، بارگیری، تخلیه و نصب سولر سیستم باشد). قیمت های بدون مهر و امضا قابل قبول نمیشود.
10. The bid winner must deposit 10% of total contract value as a contract performance guarantee to DACAAR Bank Account, the amount is refundable after successful completion of the contract.
10. شرکت برنده باید مبلغ 10% از مجموع ارزش قرارداد را بحیث تضمین اجرائیوی مؤفقانه قرارداد را به حساب داکار جمع نماید، و مبلغ متذکره بعد از تکمیل مؤفقانه قرارداد باز پرداخت میباشد.
11. 2% Tax will be applicable on the companies that has valid business license and 7% Tax will be applicable on the companies that have invalid business license, or on individuals who don't have business license, will be deducted from the contractor as a withholding tax and DACAAR will pay that amount to Ministry of Finance, the amount starts from (1 AFN).
11. 2% مالییه برای شرکت هائیکه دارای جواز با اعتبار میباشد، و 7% مالییه برای شرکت هائیکه دارای جواز معیاد اعتبار آن ختم باشد، و یا اشخاصیکه جواز ندارند توسط داکار وضع گردیده و به وزارت مالییه پرداخت میشود، آغاز مبلغ مالییه از (1 افغانی) میباشد.
12. Payment will be made after successfully and complete installation of solar pump with submission of invoice, confirmation of DACAAR relevant sites accountable within 15 working days.
12. تأدیه پول بعد از تکمیل نمودن مؤفقانه قرارداد و بعد از تصدیق نمودن مسول ساحوی داکار در جریان 15 روز رسمی قابل اجرا میباشد.

13. Award of the contract will be based on the price, quality, capacity and potentiality of bidder. The evaluation of bidder and their product will be carried out and DACAAR reserves the right to make the decision of awarding contract.
13. برنده شدن قرارداد نظر به قیمت، کیفیت، توانایی و ظرفیت داوطلب بوده، و بعد از بررسی کمپنی و اجناس صورت میگیرد. البته داکار حق تصمیم گیری در این زمینه را دارا میباشد.
14. DACAAR (Logistics Unit) adheres to National and International laws on child labour, DACAAR makes sure all its suppliers and vendors abide by such laws preventing child labour in all DACAAR activities countrywide.
14. دفتر داکار (شعبه لوژیستیک) با در نظر داشت قوانین ملی و بین المللی برای جلوگیری از کار کودکان مصمم بوده و سعی میکند که تمام فعالیتهای تهیه کننده گان و مشتریان این اداره به این اصل پایند باشند.
15. DACAAR has a zero-tolerance policy on sexual exploitation, abuse and harassment, which is defined and described in the policy document "DACAAR policy on preventing and handling sexual exploitation, abuse and harassment".
15. داکار دارای پالیسی عدم تحمل در مورد سوء استفاده، بد رفتاری و آزار و اذیت جنسی میباشد و موقف داکار در همچون مسایل بطور تفصیلی در پالیسی مذکور تشریح شده است.
16. The Humanitarian Organizations (HO) may conduct on- site visit in the contractor's premises (or may take similar measures) to ensure compliance.
16. سازمان های بشر دوستانه (HO) ممکن است تا از محلات و سایت ها به بخاطر اطمینان خاطر و تطبیق درست کار توسط قرارداد گیرنده بازدید بعمل آورده و یا ممکن است اقدامات مشابهی را انجام دهند.

For more details, please visit DACAAR Logistics Unit Main Office Kabul, Sunday through Thursday, from 8:00AM to 03:00PM. Or contact on below Email Addresses:

jamal@dacaar.org or faizullah@dacaar.org

Yours Sincerely,

Manager – Logistics Unit

Date: January 04, 2024



ANNEX (I)

Budget Breakdown / فورم ارائه آفر

DACAAR RFQ 02 PRF-12/DANIDA/2307-ROIE/ROIE1.9/PRW-0307/01.2024

Complete Solar Water Supply System for Dom Joy Village Sorkh Parsa District of Parwan Province:

S/N	Product Specifications	Unit	Total QTY	Unit Price (AFN)	Total Price (AFN)
1	Submersible Water Pump, European Made IP(65-68). Static Head 153 with water flow 2.25Litre/Sec.	No	1		
2	Digital Solar Inverter, European Made with water proof metal box and proper lock. The digital Solar Inverter to provide required power from solar panels to the submersible water pump and run the system normally in the year (Jan-Dec).	No	1		
3	Monocrystalline/Polycrystalline Solar Panels grade A, IP68 European made. The solar panels will be according to the required submersible pump and inverter powers.	Watts	13,500		
4	Stand for the Solar Panels to be considered according to the attached specifications and drawings.	LS	1		
5	Submersible Drop power Cable according to pump power design from Inverter to Submersible water pump power cable, (made in Turkey or Iranian).	Meter	330		
6	Power Cable 1*6mm ² from Solar panels to Inverter (Made in Turkey or Iranian).	Meter	180		
7	Dry Running sensor inside the water well, for protection of submersible water pump with required cable and other required accessories.	LS	1		
8	Grounding/earthing (earthing System or Grounding System of network work as a safety measure from lightening arrestor to protect human life as well as equipment and other needed accessories according to attached specifications and drawings).	Set	1		
9	Electrical conduit pipe for external power cables (Made in Taiwan).	Meter	90		
10	Auto fuses AC/DC (Made in Turkey) with other required accessories.	LS	1		
11	Wire tie white and black	Pocket	3		
12	Water flow meter and needed fittings/ accessories in accordance the pump rising pipe diameter (Made in Turkish, Iranian or local) best qualities for all).	LS	1		
13	Plastic rope (use double line) for holding solar submersible water pump diameters (16)mm ϕ with all needed accessories	Meter	80		
14	Delivery pipe (PE 100, DN75mm, PN16) according to design with required connections.The trenches excavation must be (1m deep and 0.7 m wide). PE pipe Lab test is must (supplier will do it in presence of DACAAR QA)	Meter	863		
15	Transportation Cost to Village	LS	1		
16	Installation Charges	LS	1		
Grand Total including 2/7% Government Tax, Transportation and Installation Costs: AFN					
Note: The submersible water pump, controller/inverter/switch and solar panels must be European Made. China products are not acceptable.					

Bidder Name: _____ اسم آفر دهنده:

Address, Sign and Stamp: _____ آدرس کمپنی، مهر و امضاً:

Contact No: _____ نمبر تماس:

Email Address: _____ آدرس ایمیل:

Delivery Time: _____ زمان تحویلدهی:

ANNEX (II)

Information about Types and Guaranty/Warranty of Solar Panel, Solar Pump and Inverter / معلومات و گرانتي سولر پنل، سولر پمپ و انورتر /
DACAAR RFQ 02 PRF-12/DANIDA/2307-ROIE/ROIE1.9/PRW-0307/01.2024

Complete Solar Water Supply System for Dom Joy Village Sorkh Parsa District of Parwan Province:

S/No	Manufacturer of solar Submersible Water Pump (Name of Company)	Guaranty period of Submersible Water Pump (year)	Name (Model) of Solar Panel (Name of Company)	Guaranty period of Solar Panel (year)	Name (Model) of Digital Water Proof Inverter (Name of company)	Guaranty period of Water Proof Inverter (year)
1	Name of company: Model or out let size by inch: Total power by Kw: Made in:		Name of company: Model and out put by Watt: Made in:		Name of company: Model: Total power by Kw: Made in:	

ANNEX (III)
Tentative Work Plan / پلان تخمينی کار
DACAAR RFQ 02 PRF-12/DANIDA/2307-ROIE/ROIE1.9/PRW-0307/01.2024

Complete Solar Water Supply System for Dom Joy Village Sorkh Parsa District of Parwan Province:

S/No	QTY	Items Description	Location of Installations	Contract Date	Completion Date
1	1 Set	Supply and Installation of Complete Solar Water Supply System	Dom Joy Village Sorkh Parsa District of Parwan Province	Starts Upon DACAAR Contract Final Approval	Febreuary 29, 2024

ANNEX (IV)
Technical Specifications for Submersible Pump and Solar Pump System
DACAAR RFQ 02 PRF-12/DANIDA/2307-ROIE/ROIE1.9/PRW-0307/01.2024

Complete Solar Water Supply System for Dom Joy Village Sorkh Parsa District of Parwan Province:

S/N	Specification	Unit	Quantity	Remark
1	uPVC Casing pipes/filters Class E installed in the Tube Well	M	40	Inner diameter of uPVC Casing pipe is 8"= 203.2mm.
2	Total Depth of Production Well (PW)	M	40	Actual (Drilled up to 80m, but the strata under 40m contains coal, therefore the well has been backfilled with impervious clay up to 40m).
3	Static Water level (SWL) of the Production Well	M	1.0	Actual
4	Well discharge	Lit/Sec	3.6	Actual
5	Water Draw Down of Tube Well	M	0.0	Actual
6	Dynamic Water Level in the Production Well	M	1.0	Actual
7	Submersible Water Pump Installation Depth	M	38	Plan
8	Height of Water Tank from the Well surface to top of the water tank	M	142	Water Tank ground surface is 139m higher than Tube Well Surface + 3m hight of water tank.
9	Length of water delivery Pipe (PE 100-DN75mm PN16) from submersible water pump to the Water Tank base with 1% wastages.	M	863	Water tank is located 825m away from the Tube well, The trenches excavation must be (1m deep and 0.7 m wide).
10	Length of Electrical Cable from Pump to Inverter with 1% wastages	M	330	Solar Panel stand is (292)m away from Tube Well, the cable power losses will be calculated by bidder/supplier in accordance to the cable length and pump power.
11	Required Discharge	Lit/Sec	2.25	During handover the Solar System should work for 8 hours/day and provide 64.8 m3/day
12	Static Head	M	153	1 bar extra for best water flow inside the Water Tank.
13	Total head	M	Static Head + Head losses	Head losses will be calculated by bidder/Supplier, according to delivery PE Pipe length, diameter and fittings for calculation of Total head.

Some Necessary Specifications:

1. For multiple Fixed steel and RCC Stand, the reinforced concrete should be considered M (1:1.5:3).

The location of solar fixed stand is on the ground. The embedded strong hooks J bolt 16mm steel bar is placed in RCC column/ring beams. All steel bars should be deformed 60 grade, and will be used according to the attached drawing of solar panels fixed stand.

2. 5cm PCC M (1:2:4) is under RCC footings and 5cm gravel/crash on the proper compacted base 95% according to the attached drawings of solar panels fixed stand.
3. Bidders should consider the steel angle iron (50x50)mm, the thickness average is 4mm for stands vertically, horizontally and crossing for solar panels frame and steel girder (100x45)mm - the thickness average is 8mm horizontally with proper nut and bolts or proper welding all joints to resist against all type of loads/ pressure, such as heavy winds, heavy snow, earthquake and etc. according to attached drawings of solar panels fixed stand.
4. In addition of corrosive two coating more oil coats should be applied for all angle irons of solar panels fixed stand.
5. The solar system and solar fixed stand location should be adjusted in accordance to the selected site and the well pumping test result (if needed).
6. The bidders should calculate the total head and power losses in pipes, fittings and power cables according to the system requirements along with consideration in their design. Extra charges will not be accepted, but in an exceptional case after Deputy Director/ Head of Program approval, it can be considered, and it depends on the situation. However, any deduction is possible in case of ground reality. Grounding/ earthing (solar system lightening arrestor) of all elements are connected one by one to ground copper rod with copper cabled Aluminium rod or box antenna in accordance to the drawing of solar panel fixed stand.
7. Solar panels wirings (series and parallel) should be considered in accordance to the power of submersible pump and the inverter/switch by the bidder.

Note: The submersible water pump, controller/inverter/switch and solar panels must be European Made and match all technical specifications and standard norms (e.g. the panel must be grade A, produced recently, IP68 and the production company confirmation and all certificates are needed for solar panel, pump and inverter. The inverter should also be IP65-68).

ANNEX (V)






Drawings and Design / دیزاین

DACAAR RFQ 02 PRF-12/DANIDA/2307-ROIE/ROIE1.9/PRW-0307/01.2024


Complete Solar Water Supply System for Dom Joy Village Sorkh Parsa District of Parwan Province

Note:

- 1-RCC Concrete Footing and Column M(1:1.5:3).
- 2-J-Anchor Bolt 16mm.
- 3-Deformed Grade 60 steel bar Dia.10mm according to drawing.
- 4-Steel angle iron (2"x2"x4mm).
- 5-Steel girder mini. sizing (10cmx4.5cmx8mm).
- PCC M(1:2:4).
- Foundation Compacted 95%.
- Potable water used.

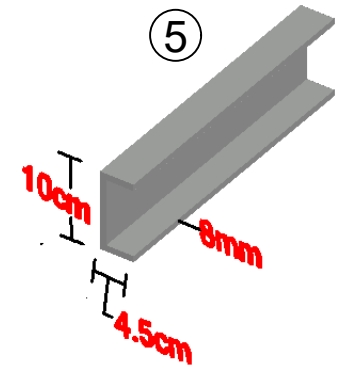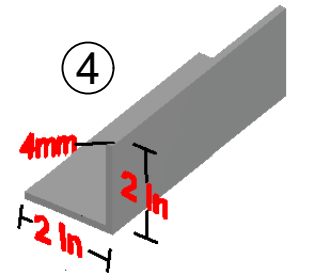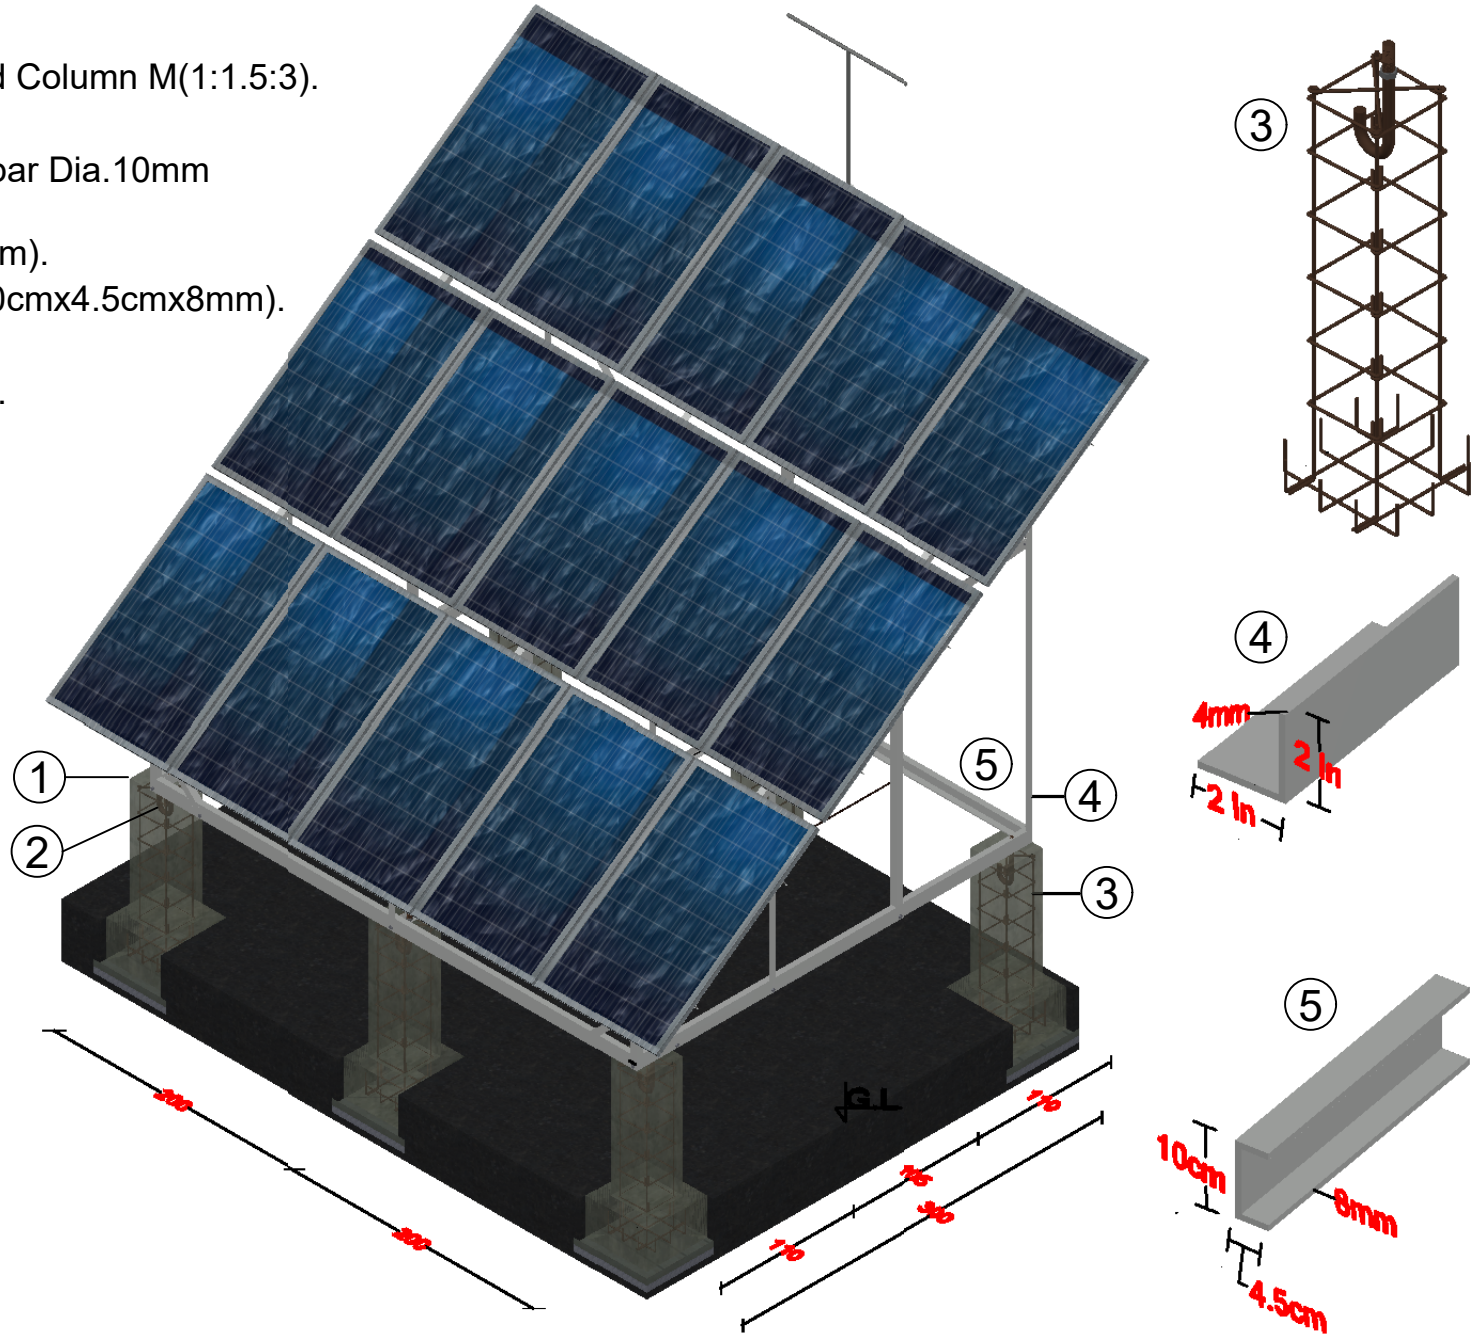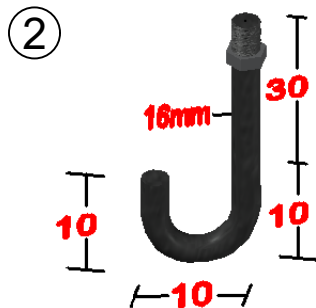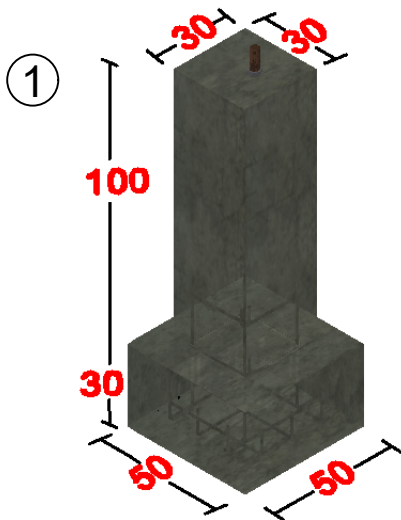


DACAAR / PROGRAMME	Funded By	Any	Village	Any	Drawn & Designed by	Survey/Design Team	Dim. Cm	Sheet Index	Project Title	Solar Design 3D
	Implemented By	DACAAR	District	Any	Reviewed By	Eng.Sayed Najib Jalal		1 4	Drawing Title	South East Isometric
	Province	Any	Checked & Approved By	Eng. Abdul Wali Muslih	Date :	Nov.2023				

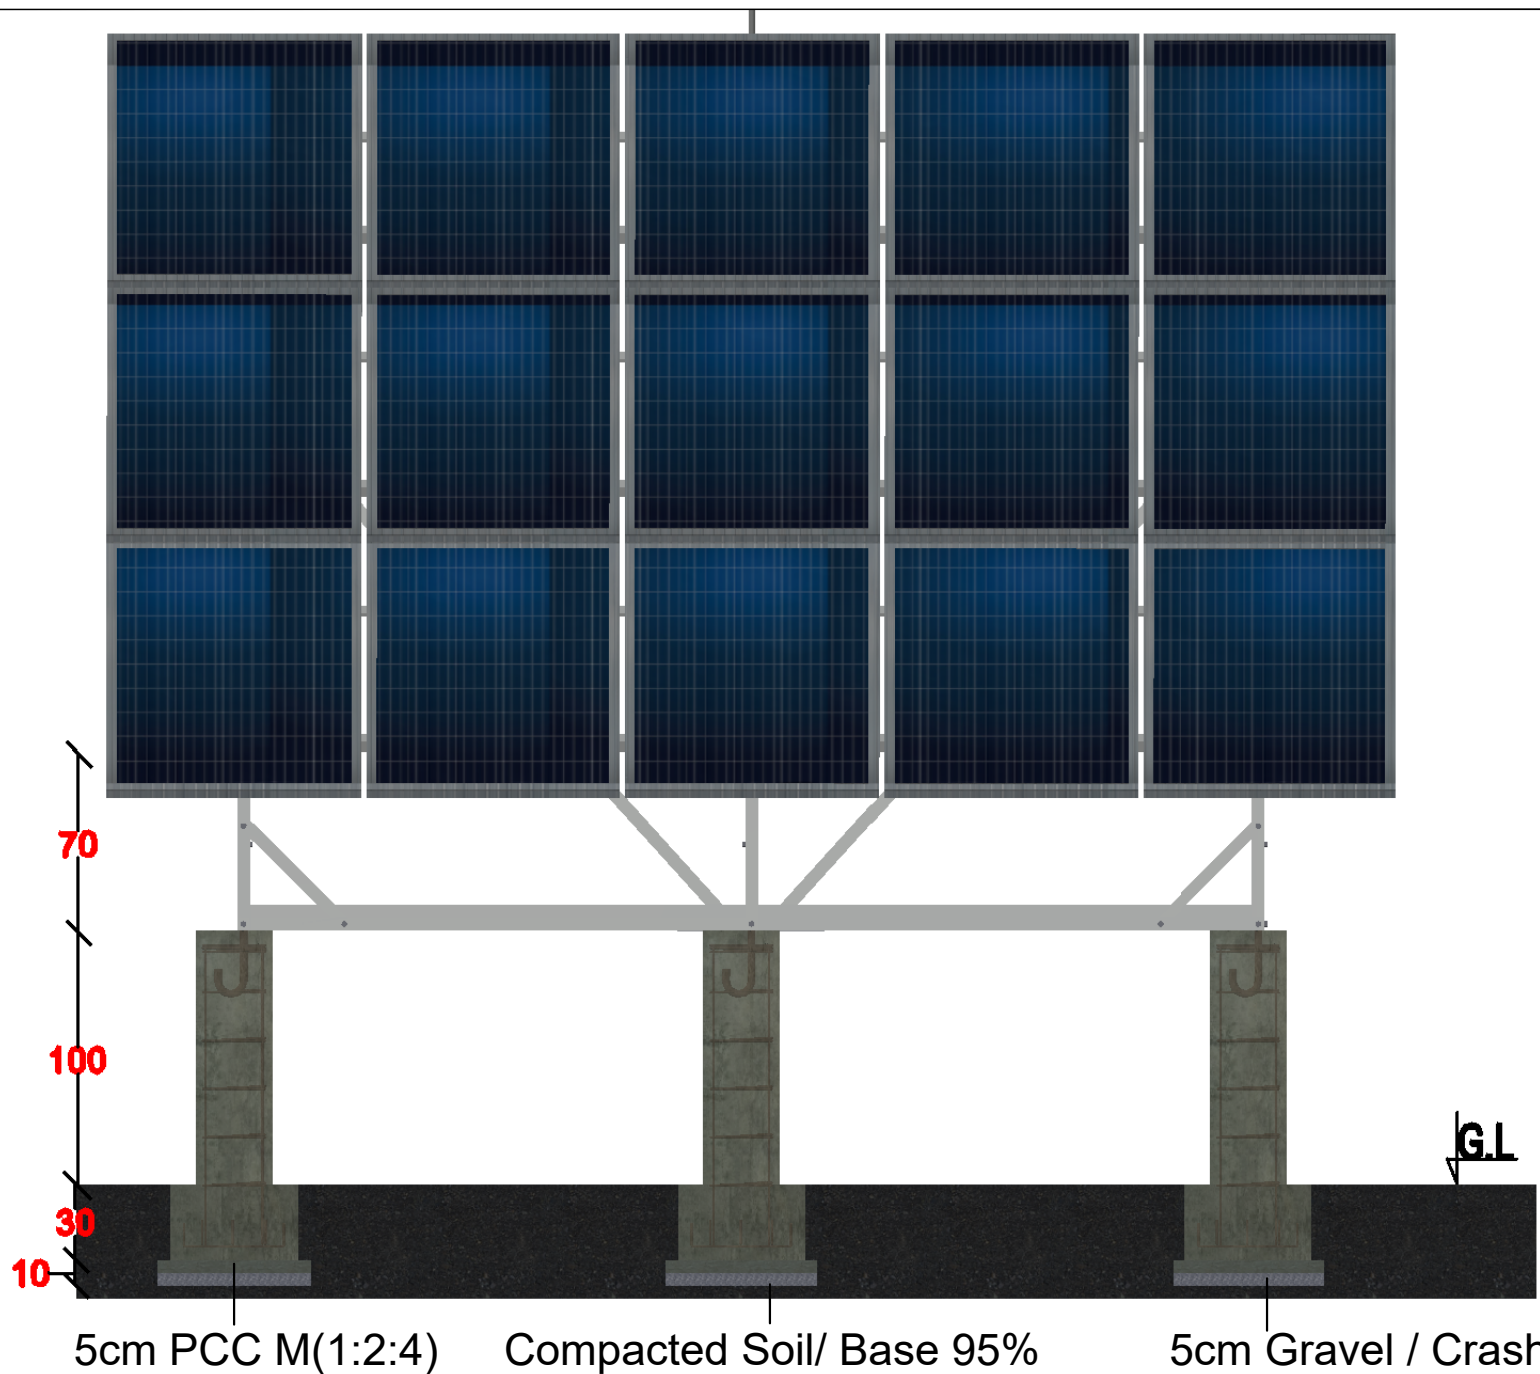


5cm PCC M(1:2:4) Compacted Soil/ Base 95% 5cm Gravel / Crash

DACAAR / PROGRAMME	Funded By	Any	Village	Any	Drawn & Designed by	Survey/Design Team	Dim. Cm	Sheet Index 2 4	Project Title	Solar Design 3D
	Implemented By	DACAAR	District	Any	Reviewed By	Eng.Sayed Najib Jalal			Drawing Title	Front View
			Province	Any	Checked & Approved By	Eng. Abdul Wali Muslih			Date :	Nov.2023

Angle Θ = According to bidder solar system design

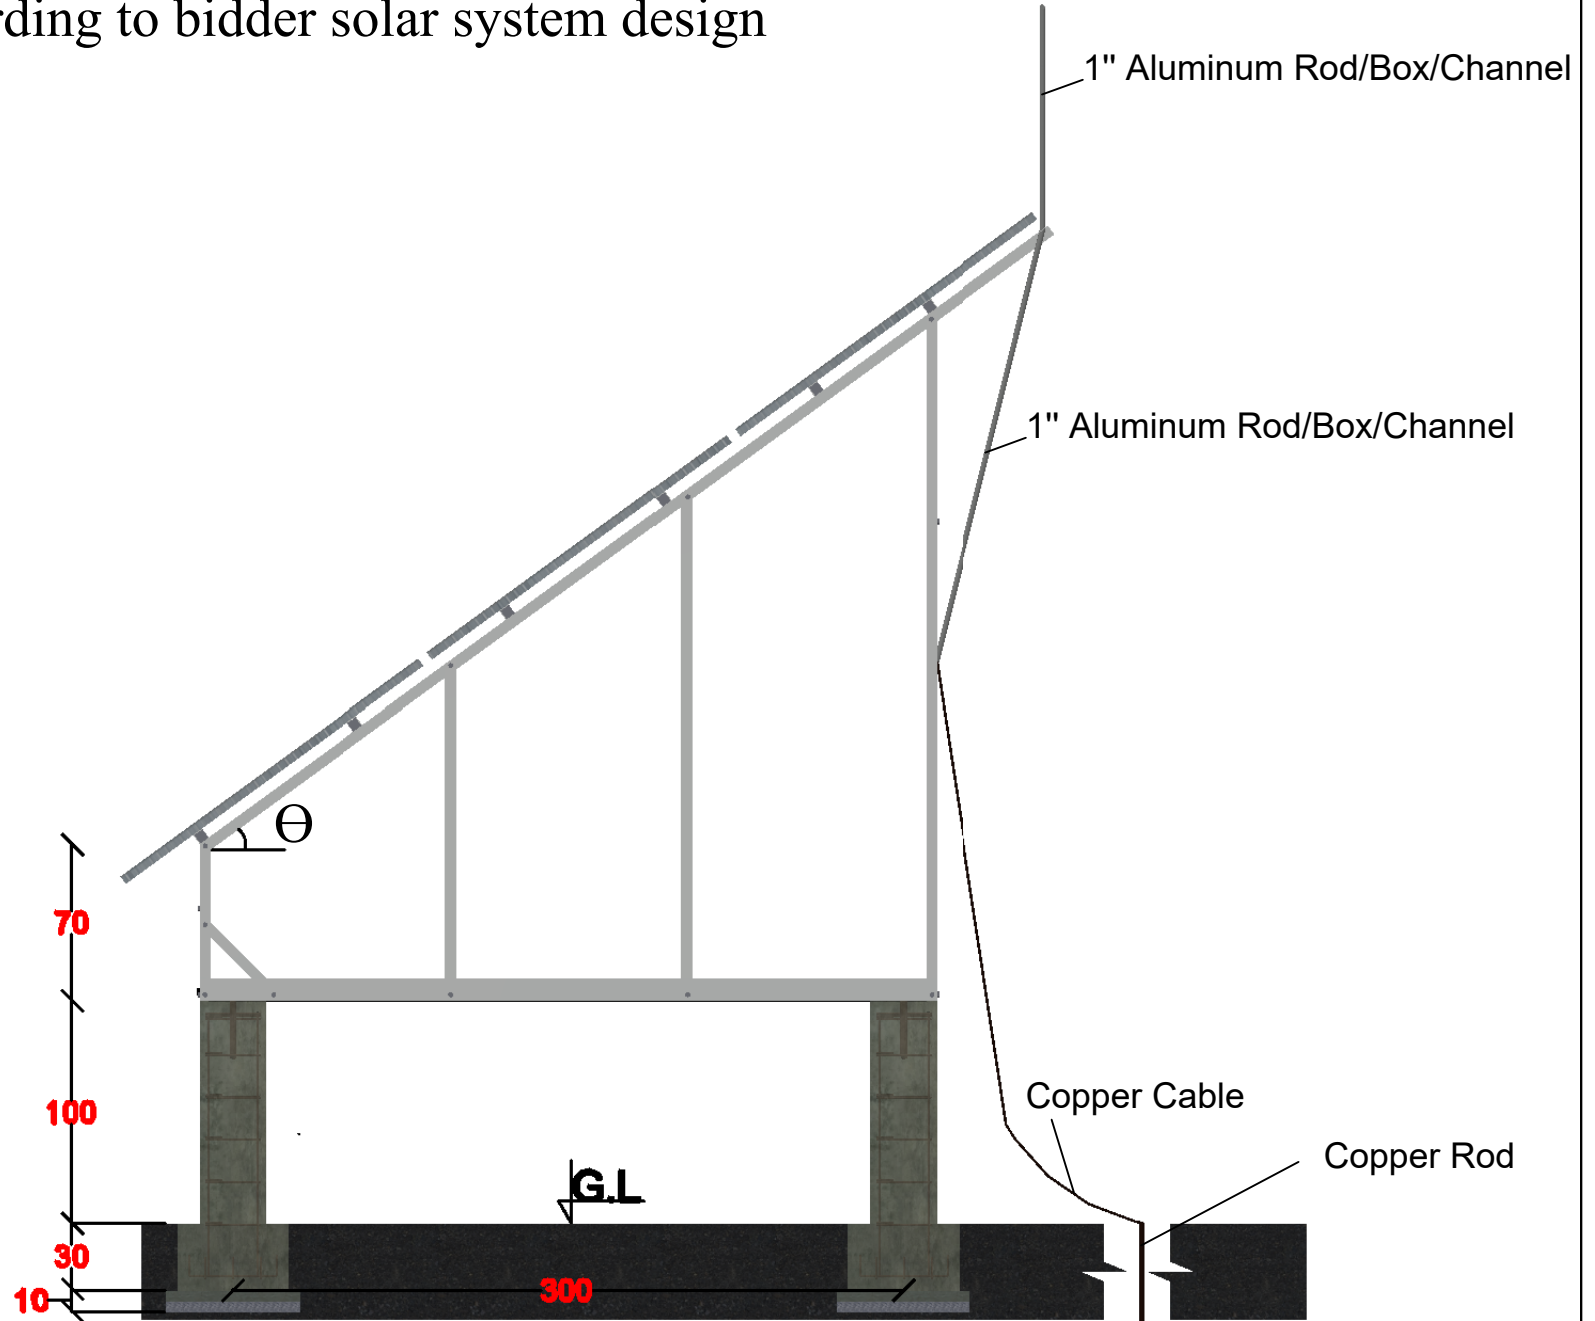

DACAAR / PROGRAMME	Funded By	Any	Village	Any	Drawn & Designed by	Survey/Design Team	Dim. Cm	Sheet Index	Project Title	Solar Design 3D
	Implemented By	DACAAR	District	Any	Reviewed By	Eng.Sayed Najib Jalal		3 4	Drawing Title	Right Side View
			Province	Any	Checked & Approved By	Eng. Abdul Wali Muslih			Date :	Nov.2023

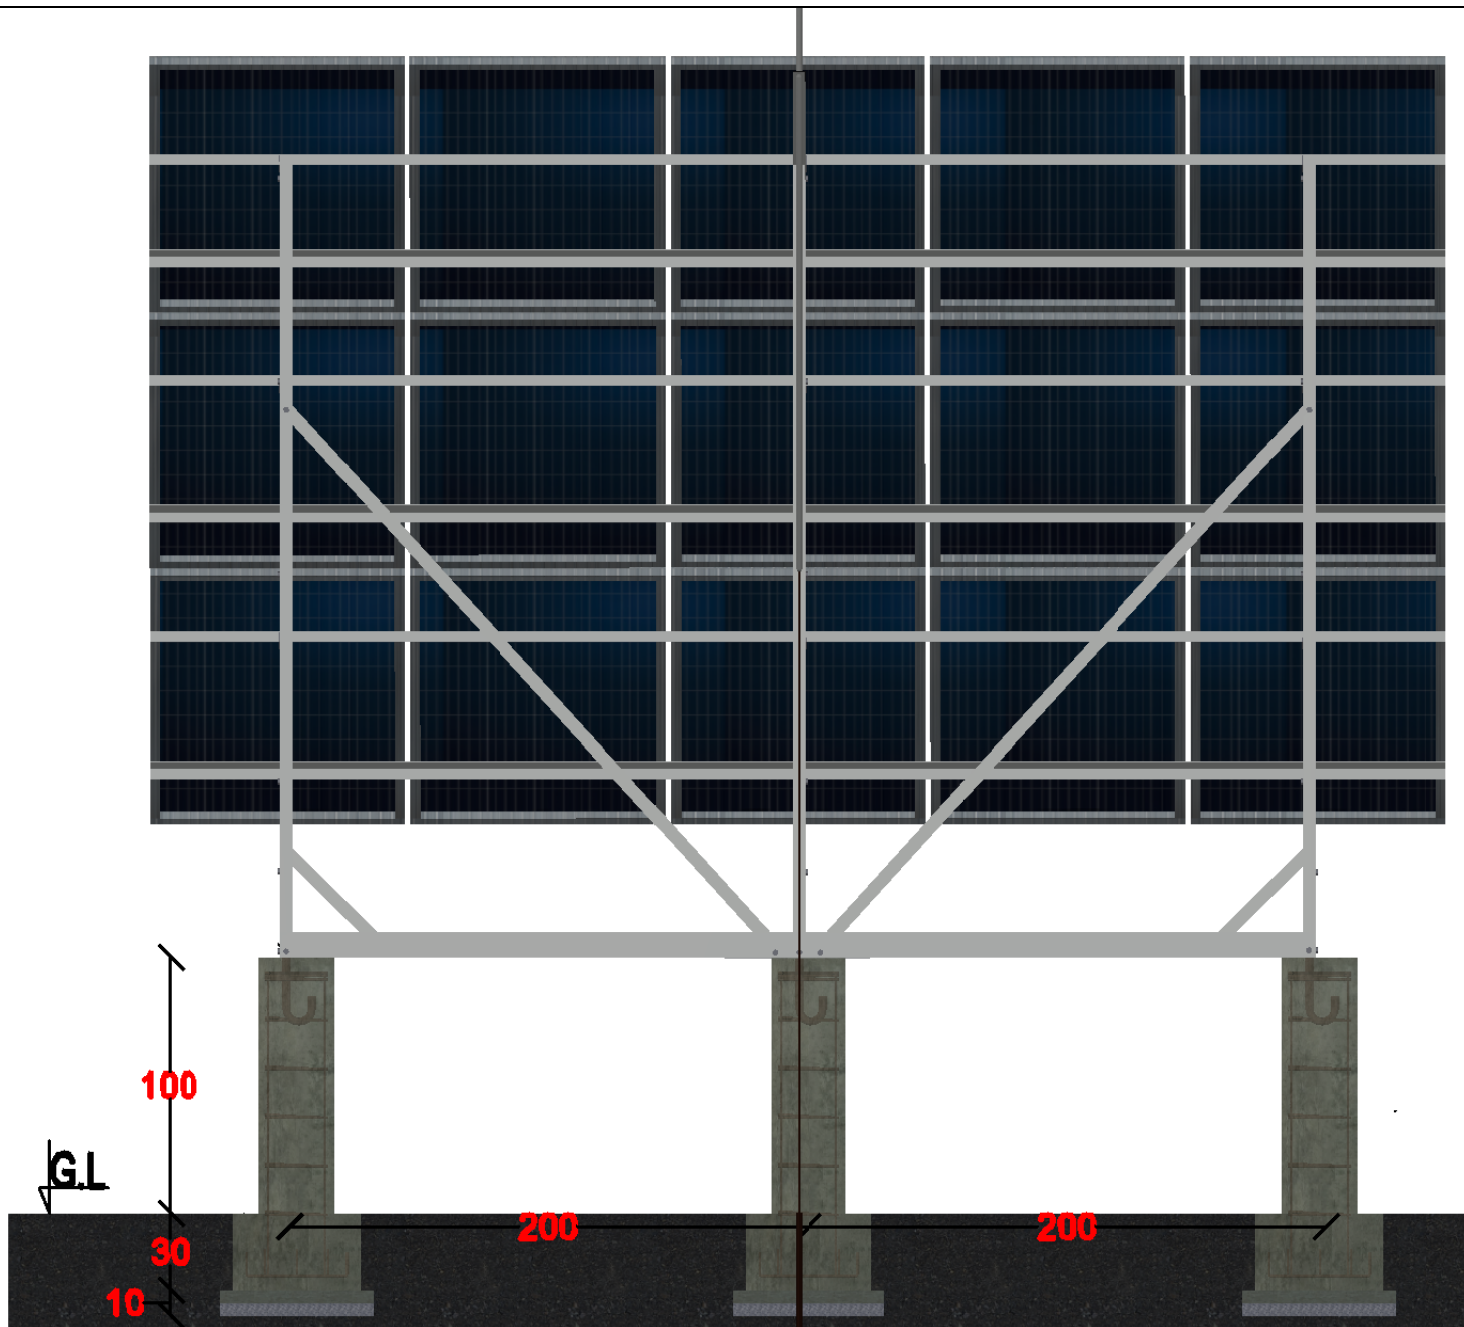

DACAAR / PROGRAMME	Funded By	Any	Village	Any	Drawn & Designed by	Survey/Design Team	Dim. Cm	Sheet Index 4/4	Project Title	Solar Design 3D
	Implemented By	DACAAR	District	Any	Reviewed By	Eng.Sayed Najib Jalal			Drawing Title	Back View
			Province	Any	Checked & Approved By	Eng. Abdul Wali Muslih			Date :	Nov.2023