



Project Name: Safidchashma Solar system

Input Summary


Wednesday, 29,May,2024

Location:	Afghanistan, Ghor(34°, 64°)
GPS:	34.35903°, 66.25081°
Designer:	Farid Ahmad Qaderi
Water Demand:	1.2(m³/h)
Avg. Water Production:	9(m³/d) According to 6 hours pump operation during sunny days at STC (1000 w/m²) irradiation at 25C°
Head (SWL+DD):	76(m)
Pipe Friction losses:	10m (5%)
Total Dynamic Head:	86 (m)


Main Products	Description	Unite	Quantity
Solar	PROPSOLAR 270W Poly crystalline 37.9V 9.22A	panels	4
Pump	PEDROLLO 4SR1.5/17 1HP 0.75Kw 220V	pc	1
Controller	FRECON IP65 1.5kw 220V	pc	1
Structure	Fixed Structure	set	1
Motor Cable	4*4mm2	m	170
Solar Cable	2*6mm2	m	170
Pipline	PE 0.5 Inch/16mm (PE100, PN16)	m	190

Accessories	Description	Unite	Quantity
Float switch	Mechanical	pcs	1
PV disconnect switch	IP54	pcs	1
Inverter box	IP20	Box	1
Grounding rod	Copper	set	1
Cable splice kit	IP68	set	1
Safety rope	Plastic	m	80
Well probe sensors	Electronic	set	1
Cable 2*1.5mm2	For sensors	m	180
Earthing Cable	1*16mm2	m	30
Pump fittings	Poly ethylene	set	1


Daily Average output/month

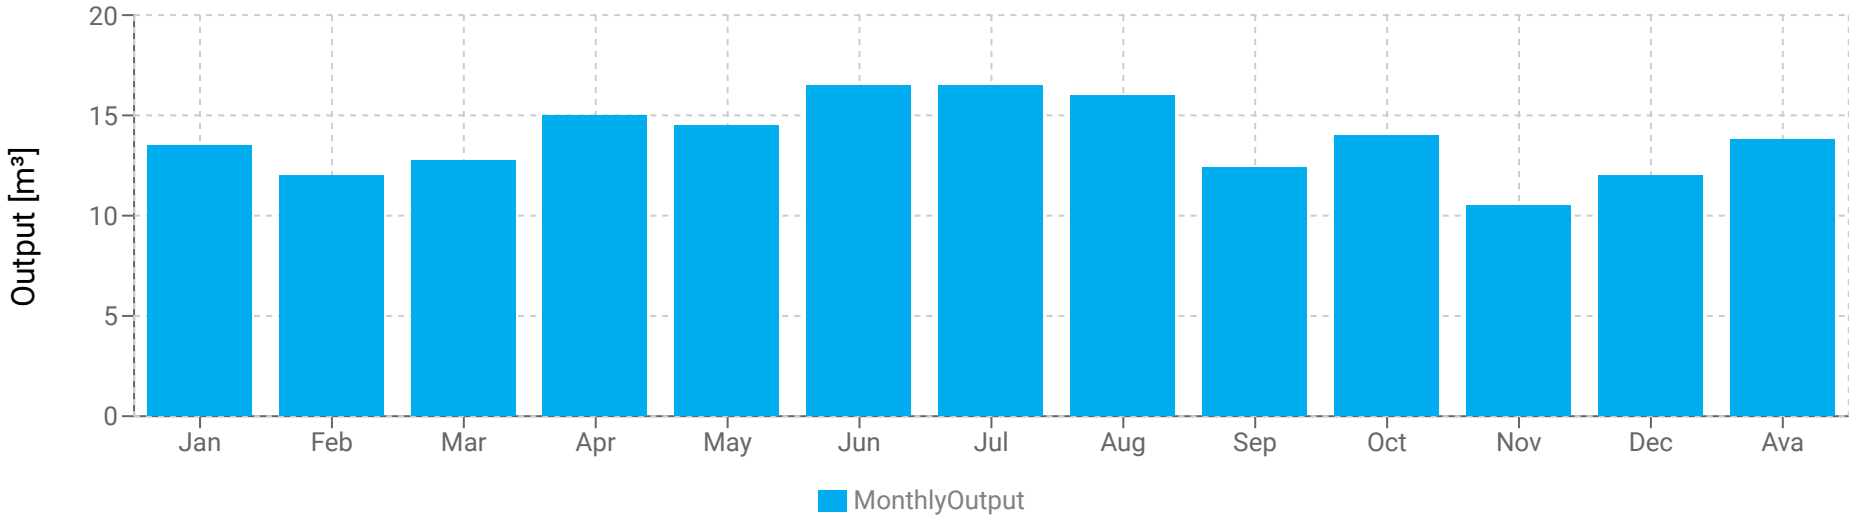


Hourly Output

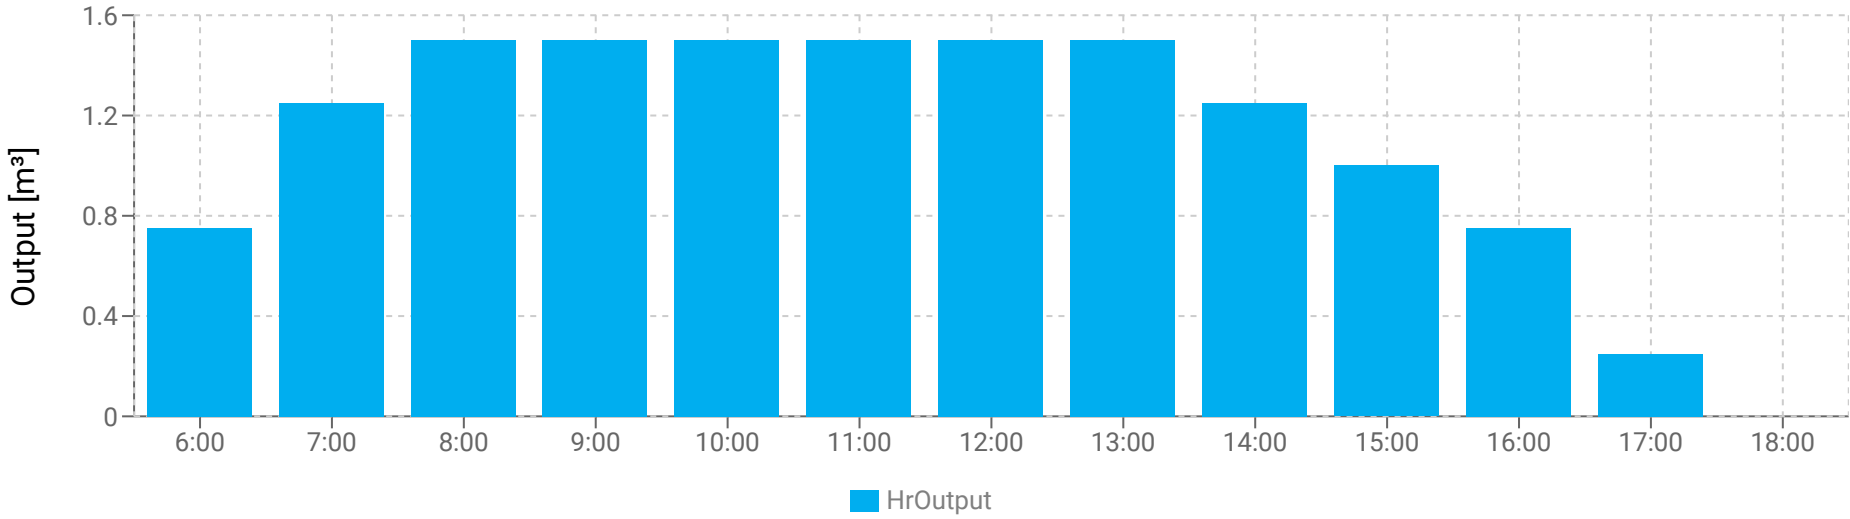


Irradiation value in deferent months of year

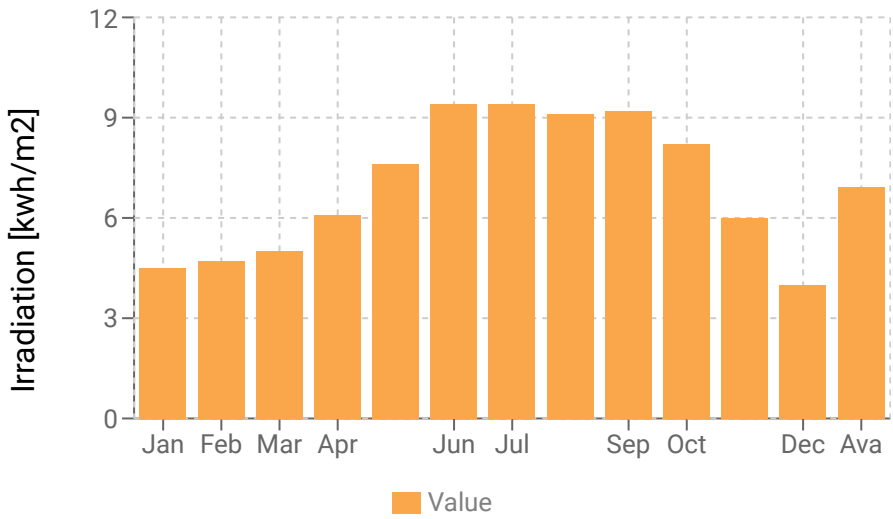


Hourly Values

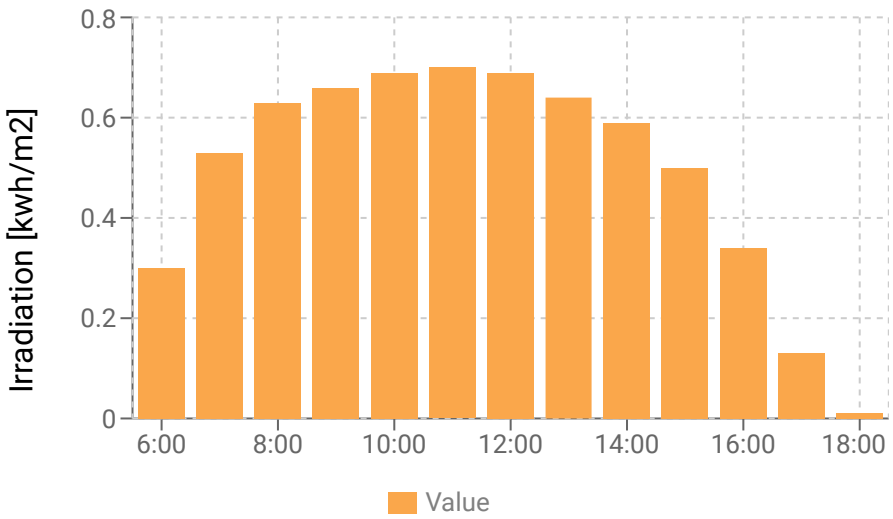

Energy value in deferent months of year

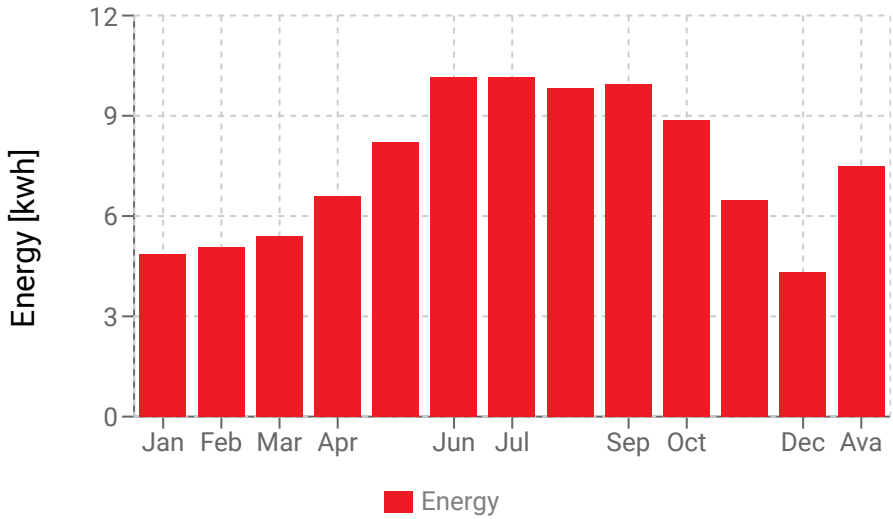

Hourly Values

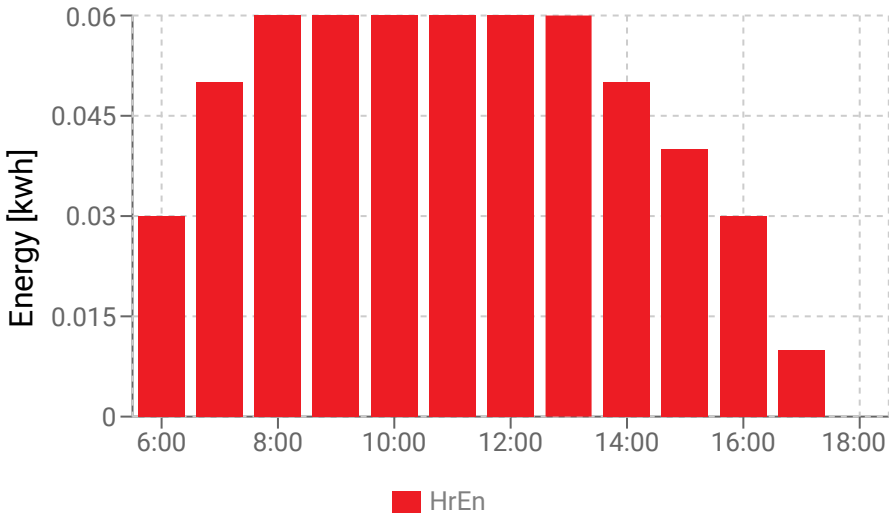

Project Name: Safidchashma Solar system

Submersible pump specification:

Brand:

Model:

Power:

Hours power:

Current:

OutLet:

Voltage:

Phase:

Diameter:

Weight:

Made in:

PEDROLLO

4SR1.5/17

0.75Kw

1HP

8.6A

0.5Inch



220V

3Phase

4inch

14.3kg

Italy

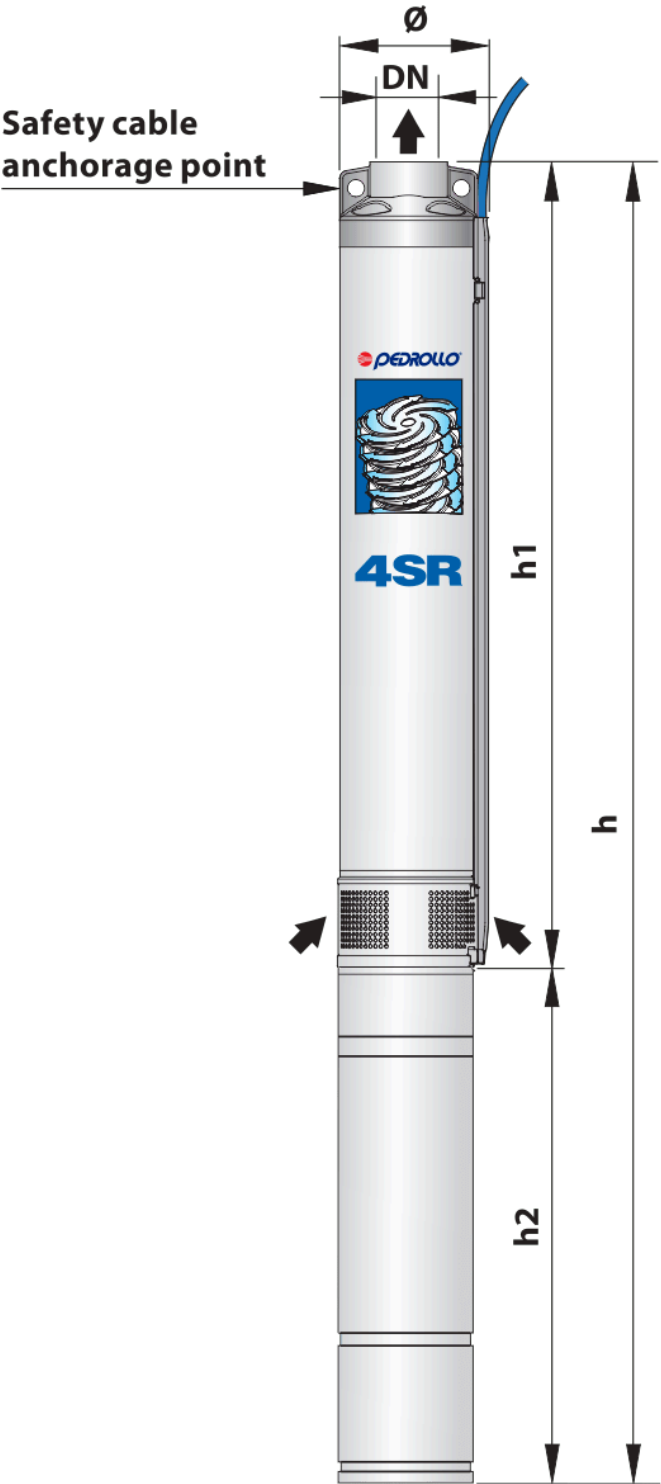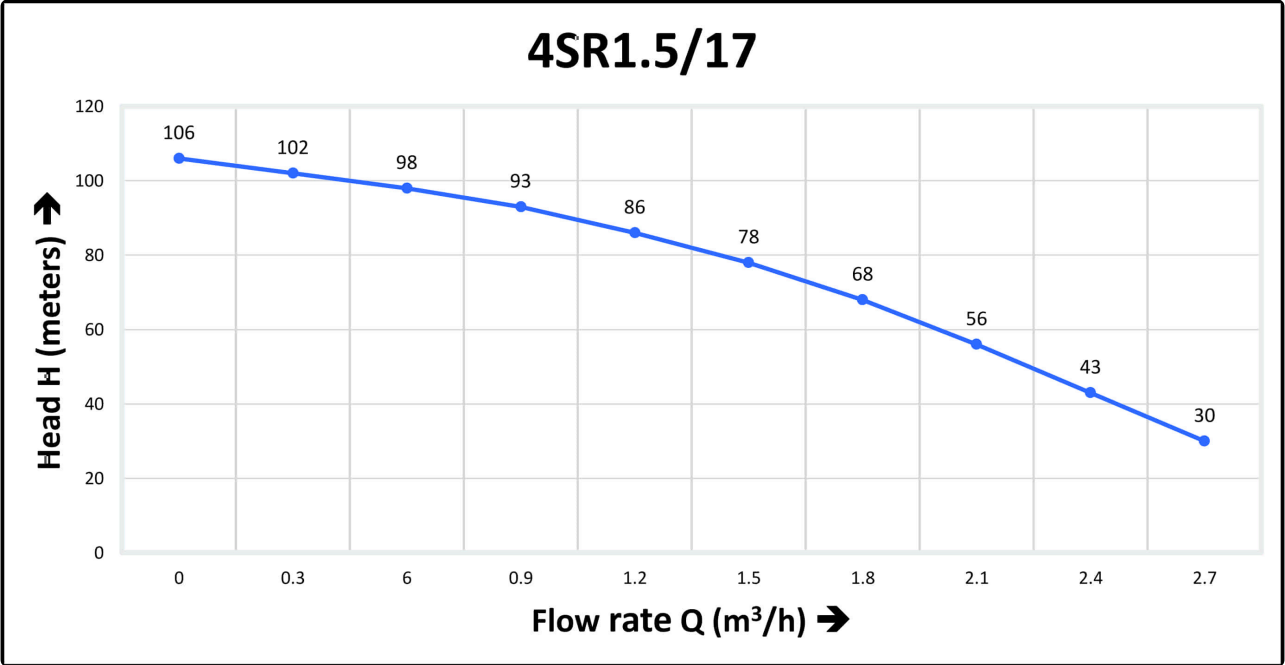

Dimensions and weight




MODEL	PORT	DIMENSIONS mm				kg
		Ø	h1	h2	h	
Three-phase	DN					3~
4SR1.5/17 - PD	1¼"	98	499	356	855	14.2

Project Name:



Safidchashma Solar system

Solar specification:

Brand:	PROPSOLAR
Model:	PS-660
Cell Technology:	Poly crystalline
Rated Maximum power (Pmax):	270 Wp
Voltage at Maximum power(Vmp):	30.9 V
Current at Maximum power(Imp):	8.73A
Open Circuit Voltage(Voc):	37.9V
Short Circuit Current (Isc):	9.22A
Mazimum System Voltage:	1000V
Weight:	18 kg
Made in:	China

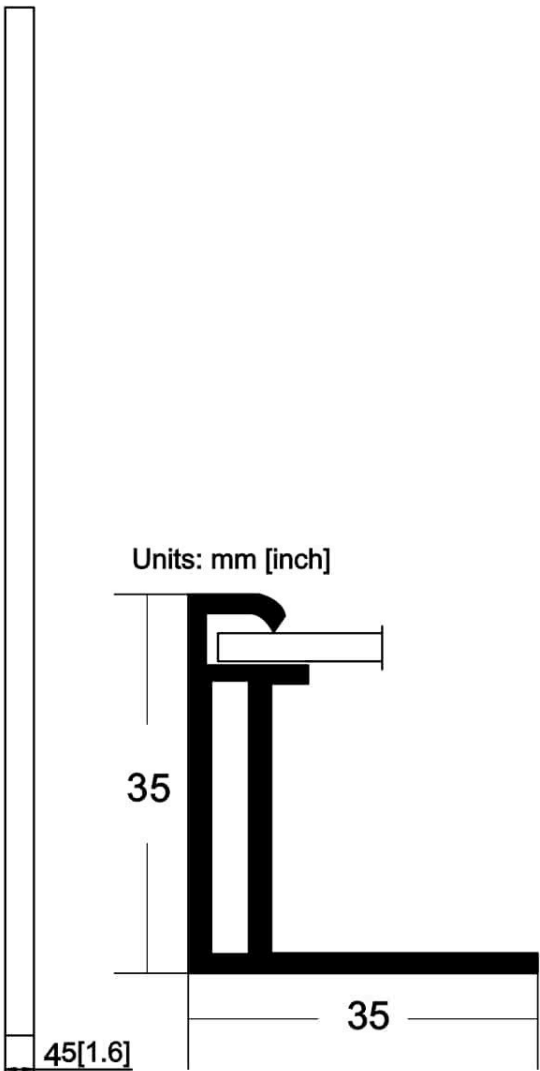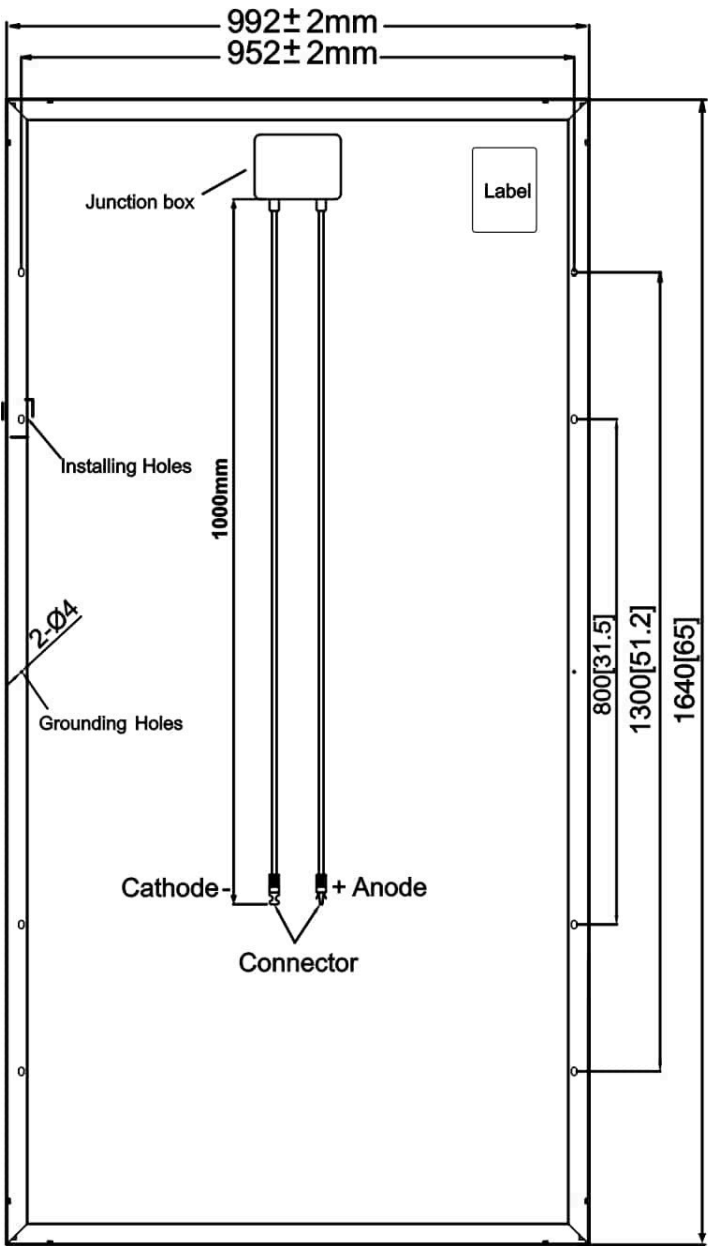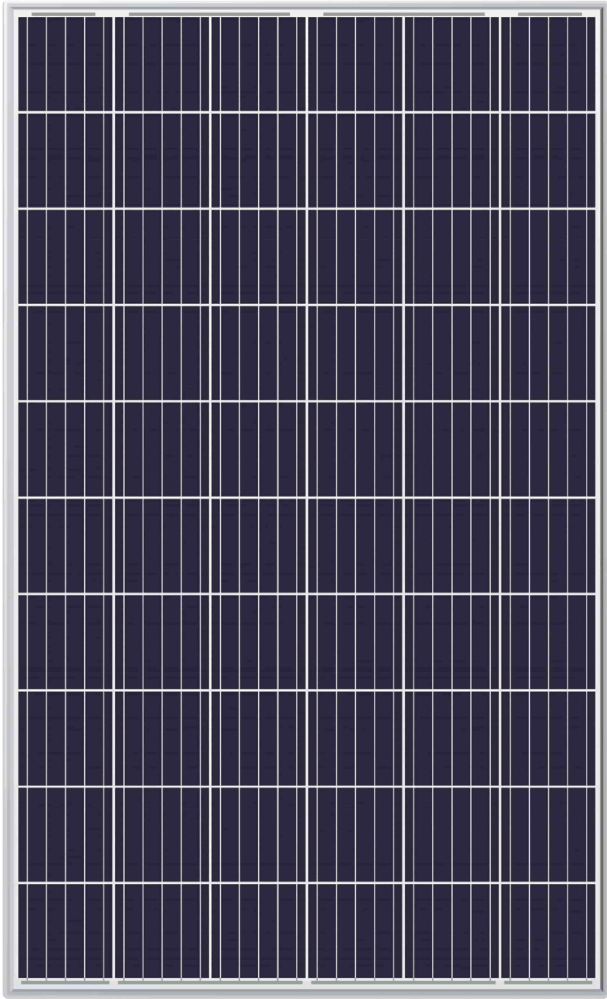


I-V CURVE

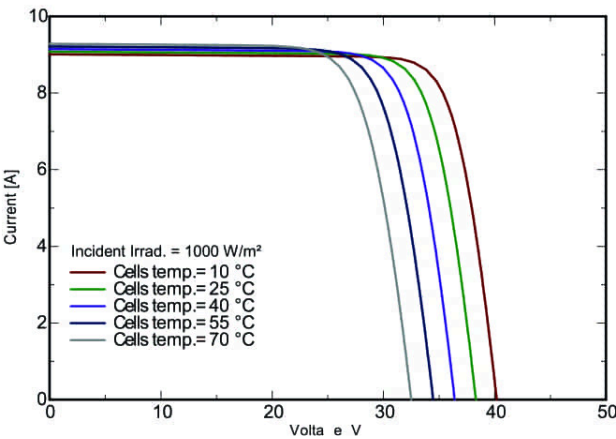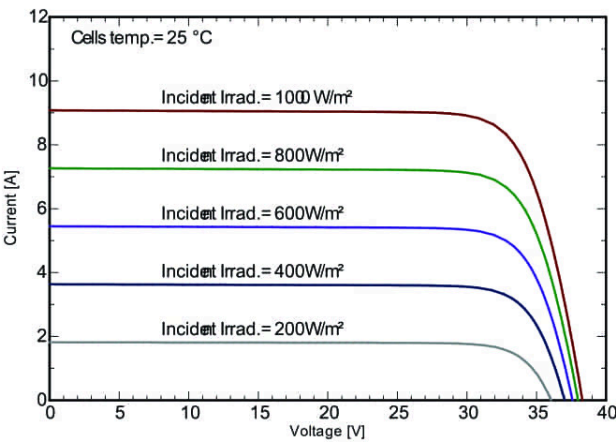

Project Name: Safidchashma Solar system

Controller specification:

Brand:	FRECON IP65
Model:	PV580-2S-1.5
Power:	1.5 Kw
Hours power:	2 HP
Current:	10.5 A
Voltage(AC):	220 V
Voltage(DC):	200-260V
Weight:	11.4 kg
Made in:	China

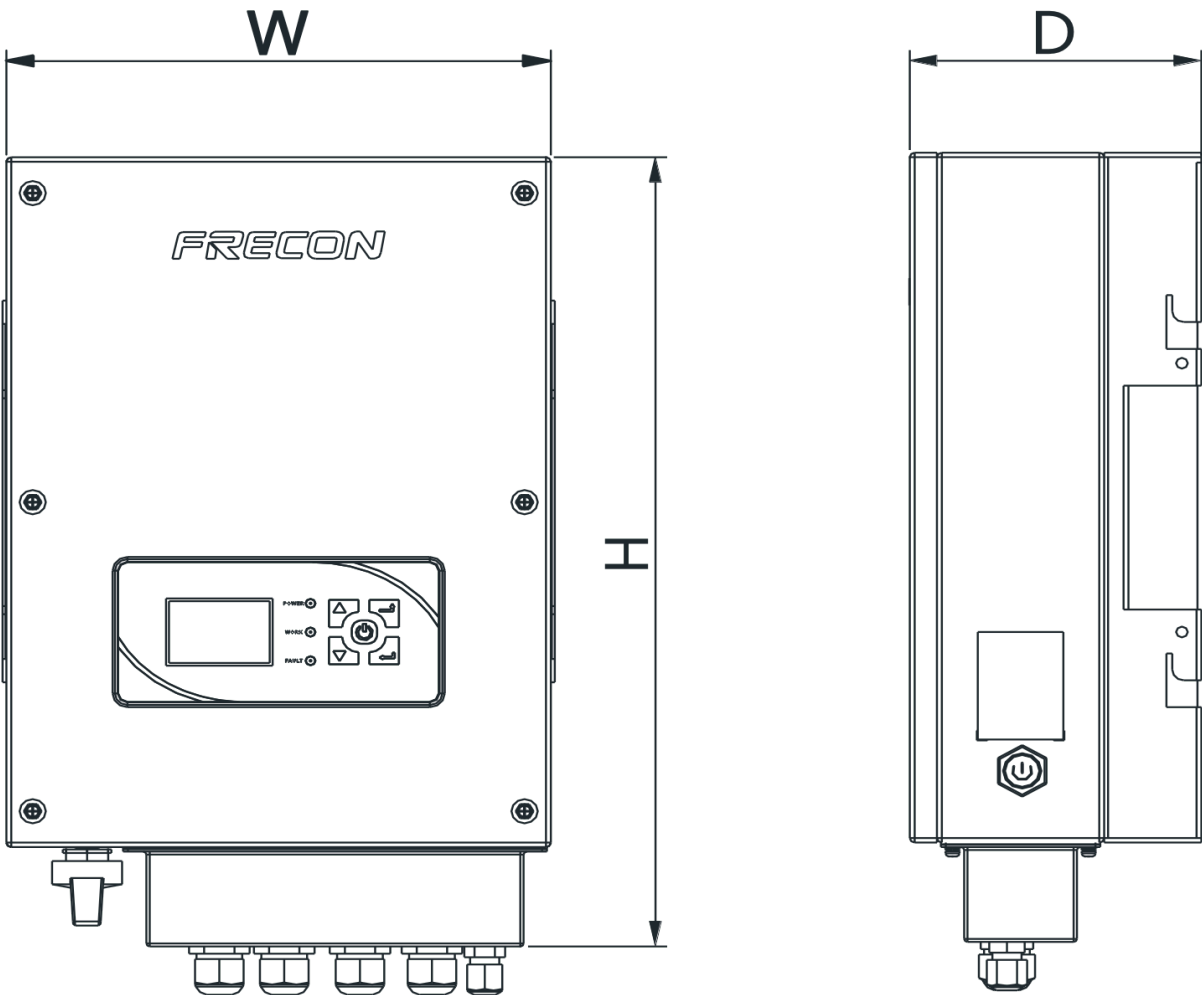

Model	External and installation dimensions (mm)			N.W (kg)
	W	H	D	
PV580-2S-1.5B	280	440	150	11.4

Project Name: Safidchashma Solar system

Strucuter specification:

Brand:	No
Model:	Fixed Structure
Capacity:	4/6/8/10/12 panels




Note: Image may be deferent with actual product as this is a graphic design.

Project Name: Safidchashma Solar system

Wiring Diagram

$$2^s \times 2^p = 4^p \times 270W = 1080W$$

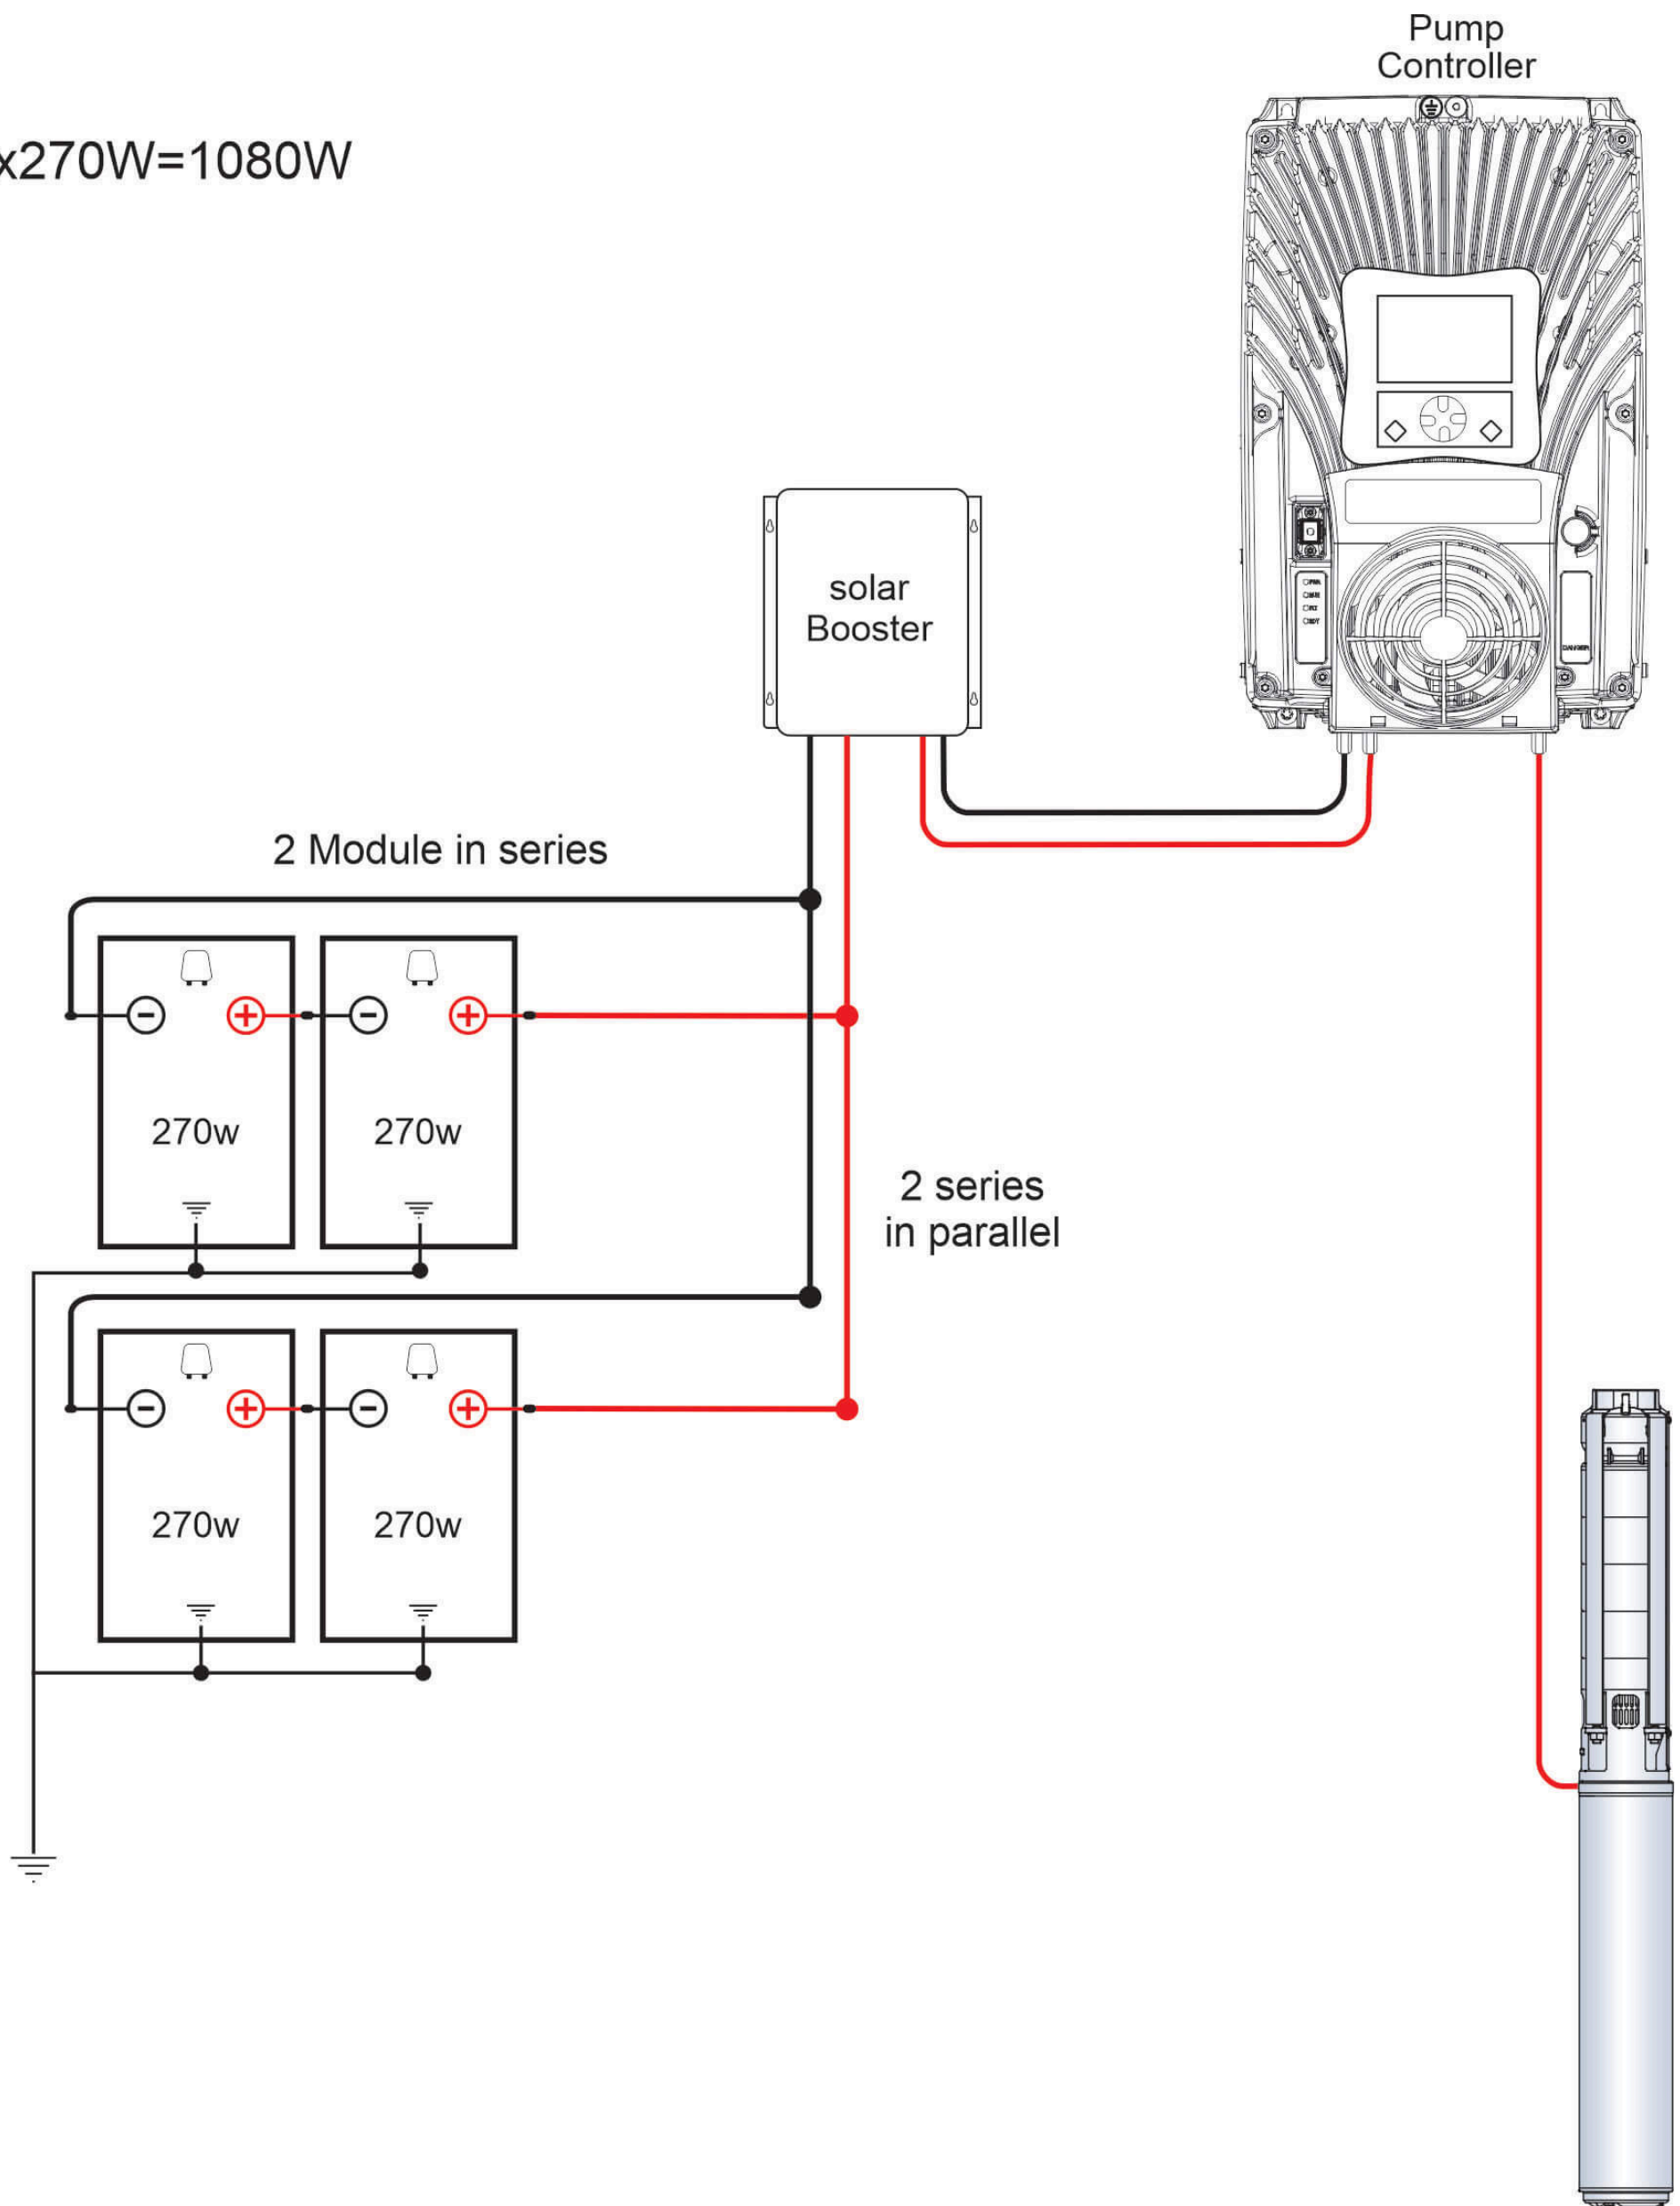



Project Name:

Safidchashma Solar system

Area Diagram


Required Area for this project:

Minimum 65m²

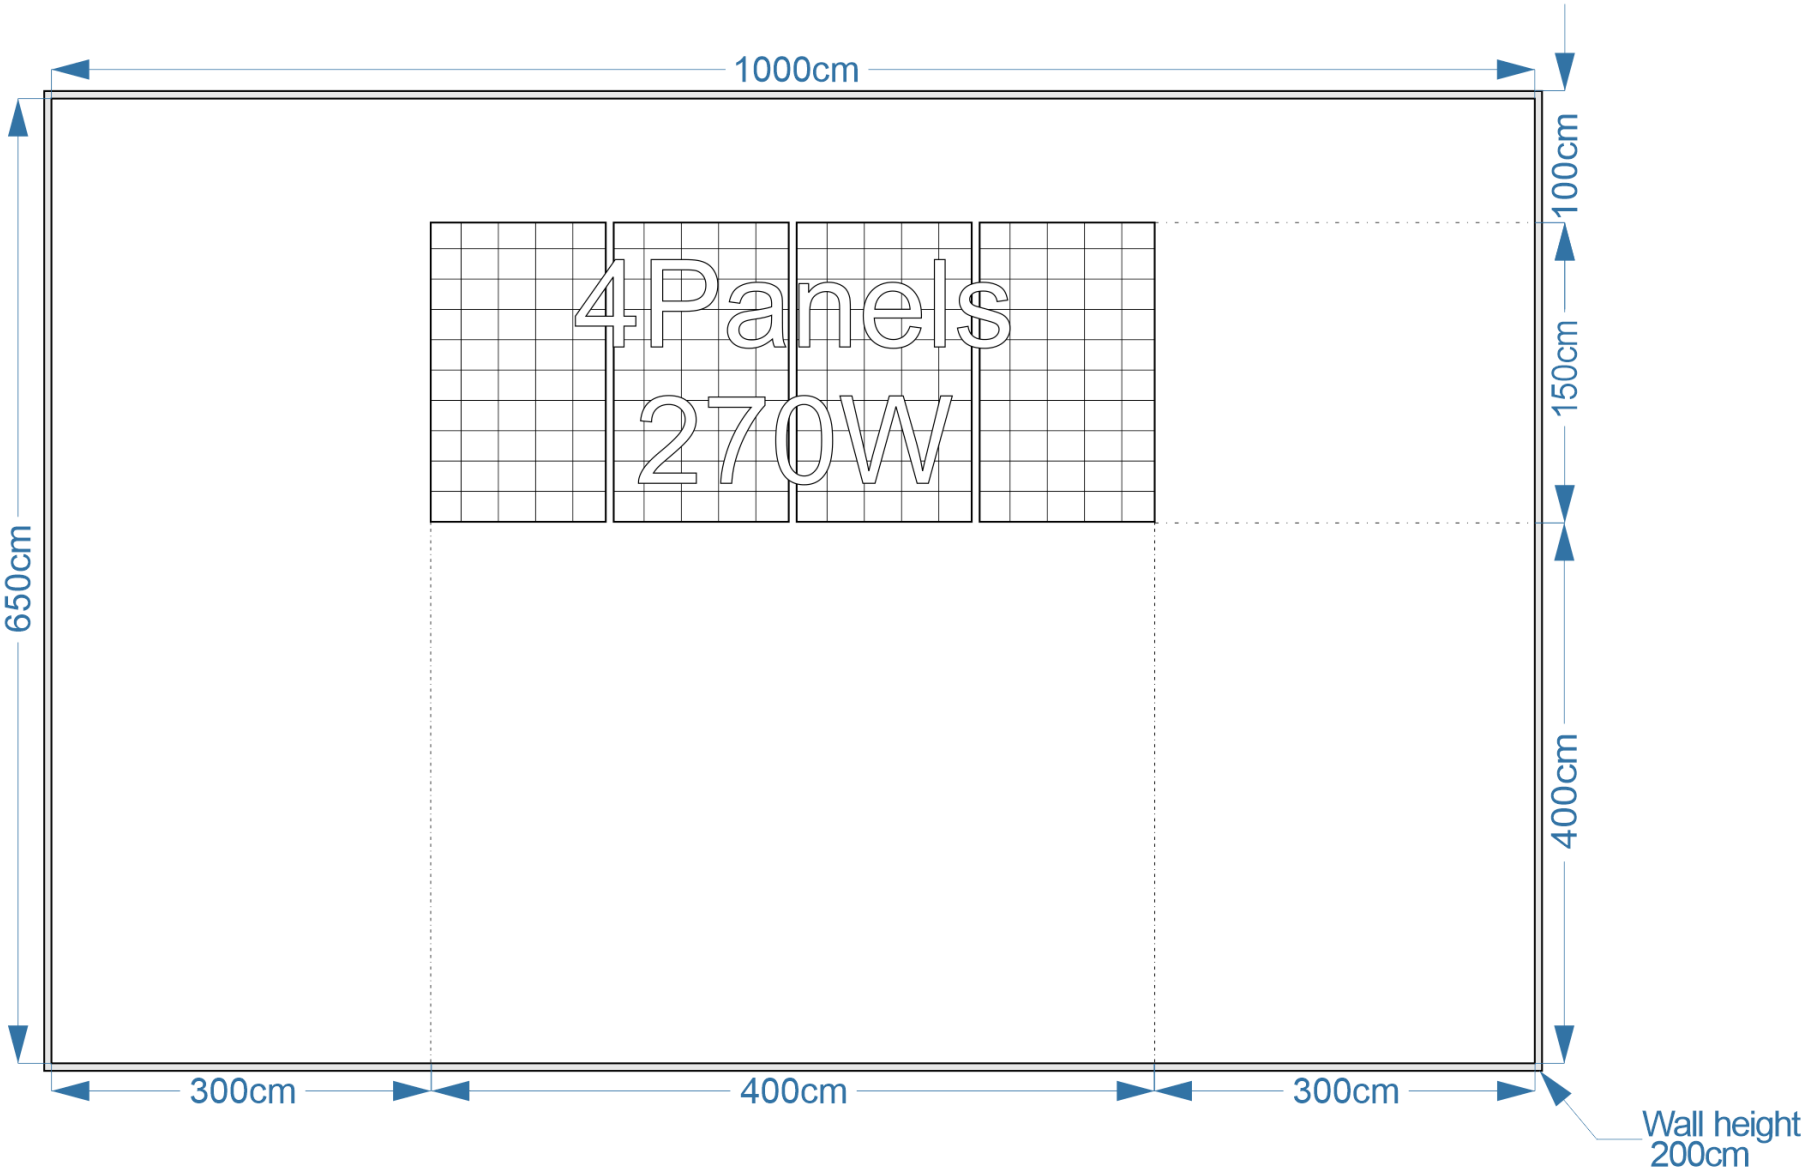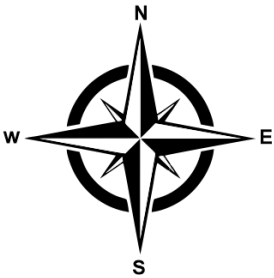

Note: The area which the panels will install must be south face.

System General layout

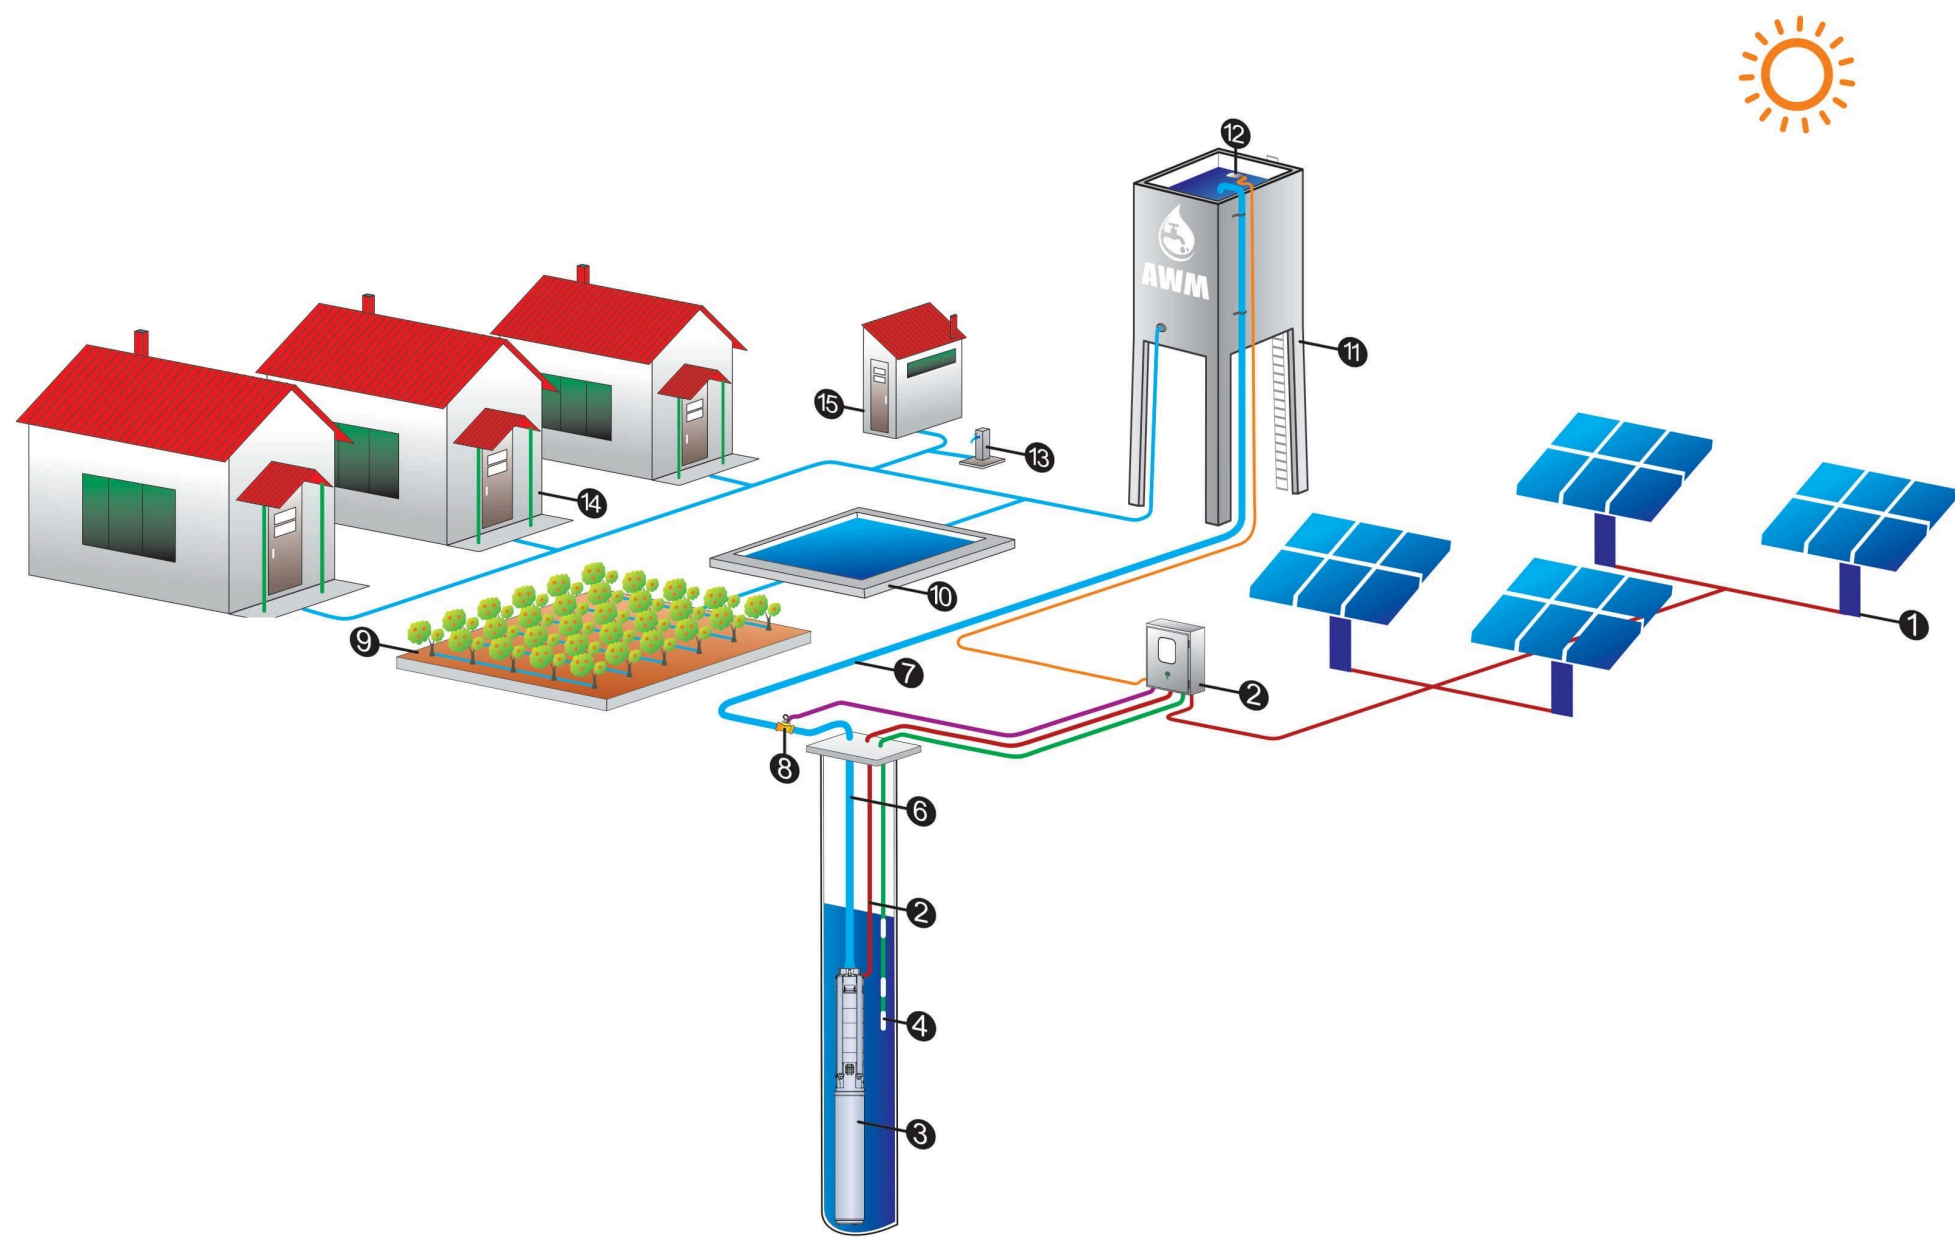

- 1- Solar panels

2- Pump controller

3- Submersible

4- well probe sensors

5- Pump electrical cable

6- Non return valve

7- Pressure Gauge

8- Water meter
- 9- Garden

10- Swimming pool

11- Water reservoir


12- Flaut switch

13- Flaut switch Ele. cable

14- Residential Houses

15- Toilet

Sizing layout

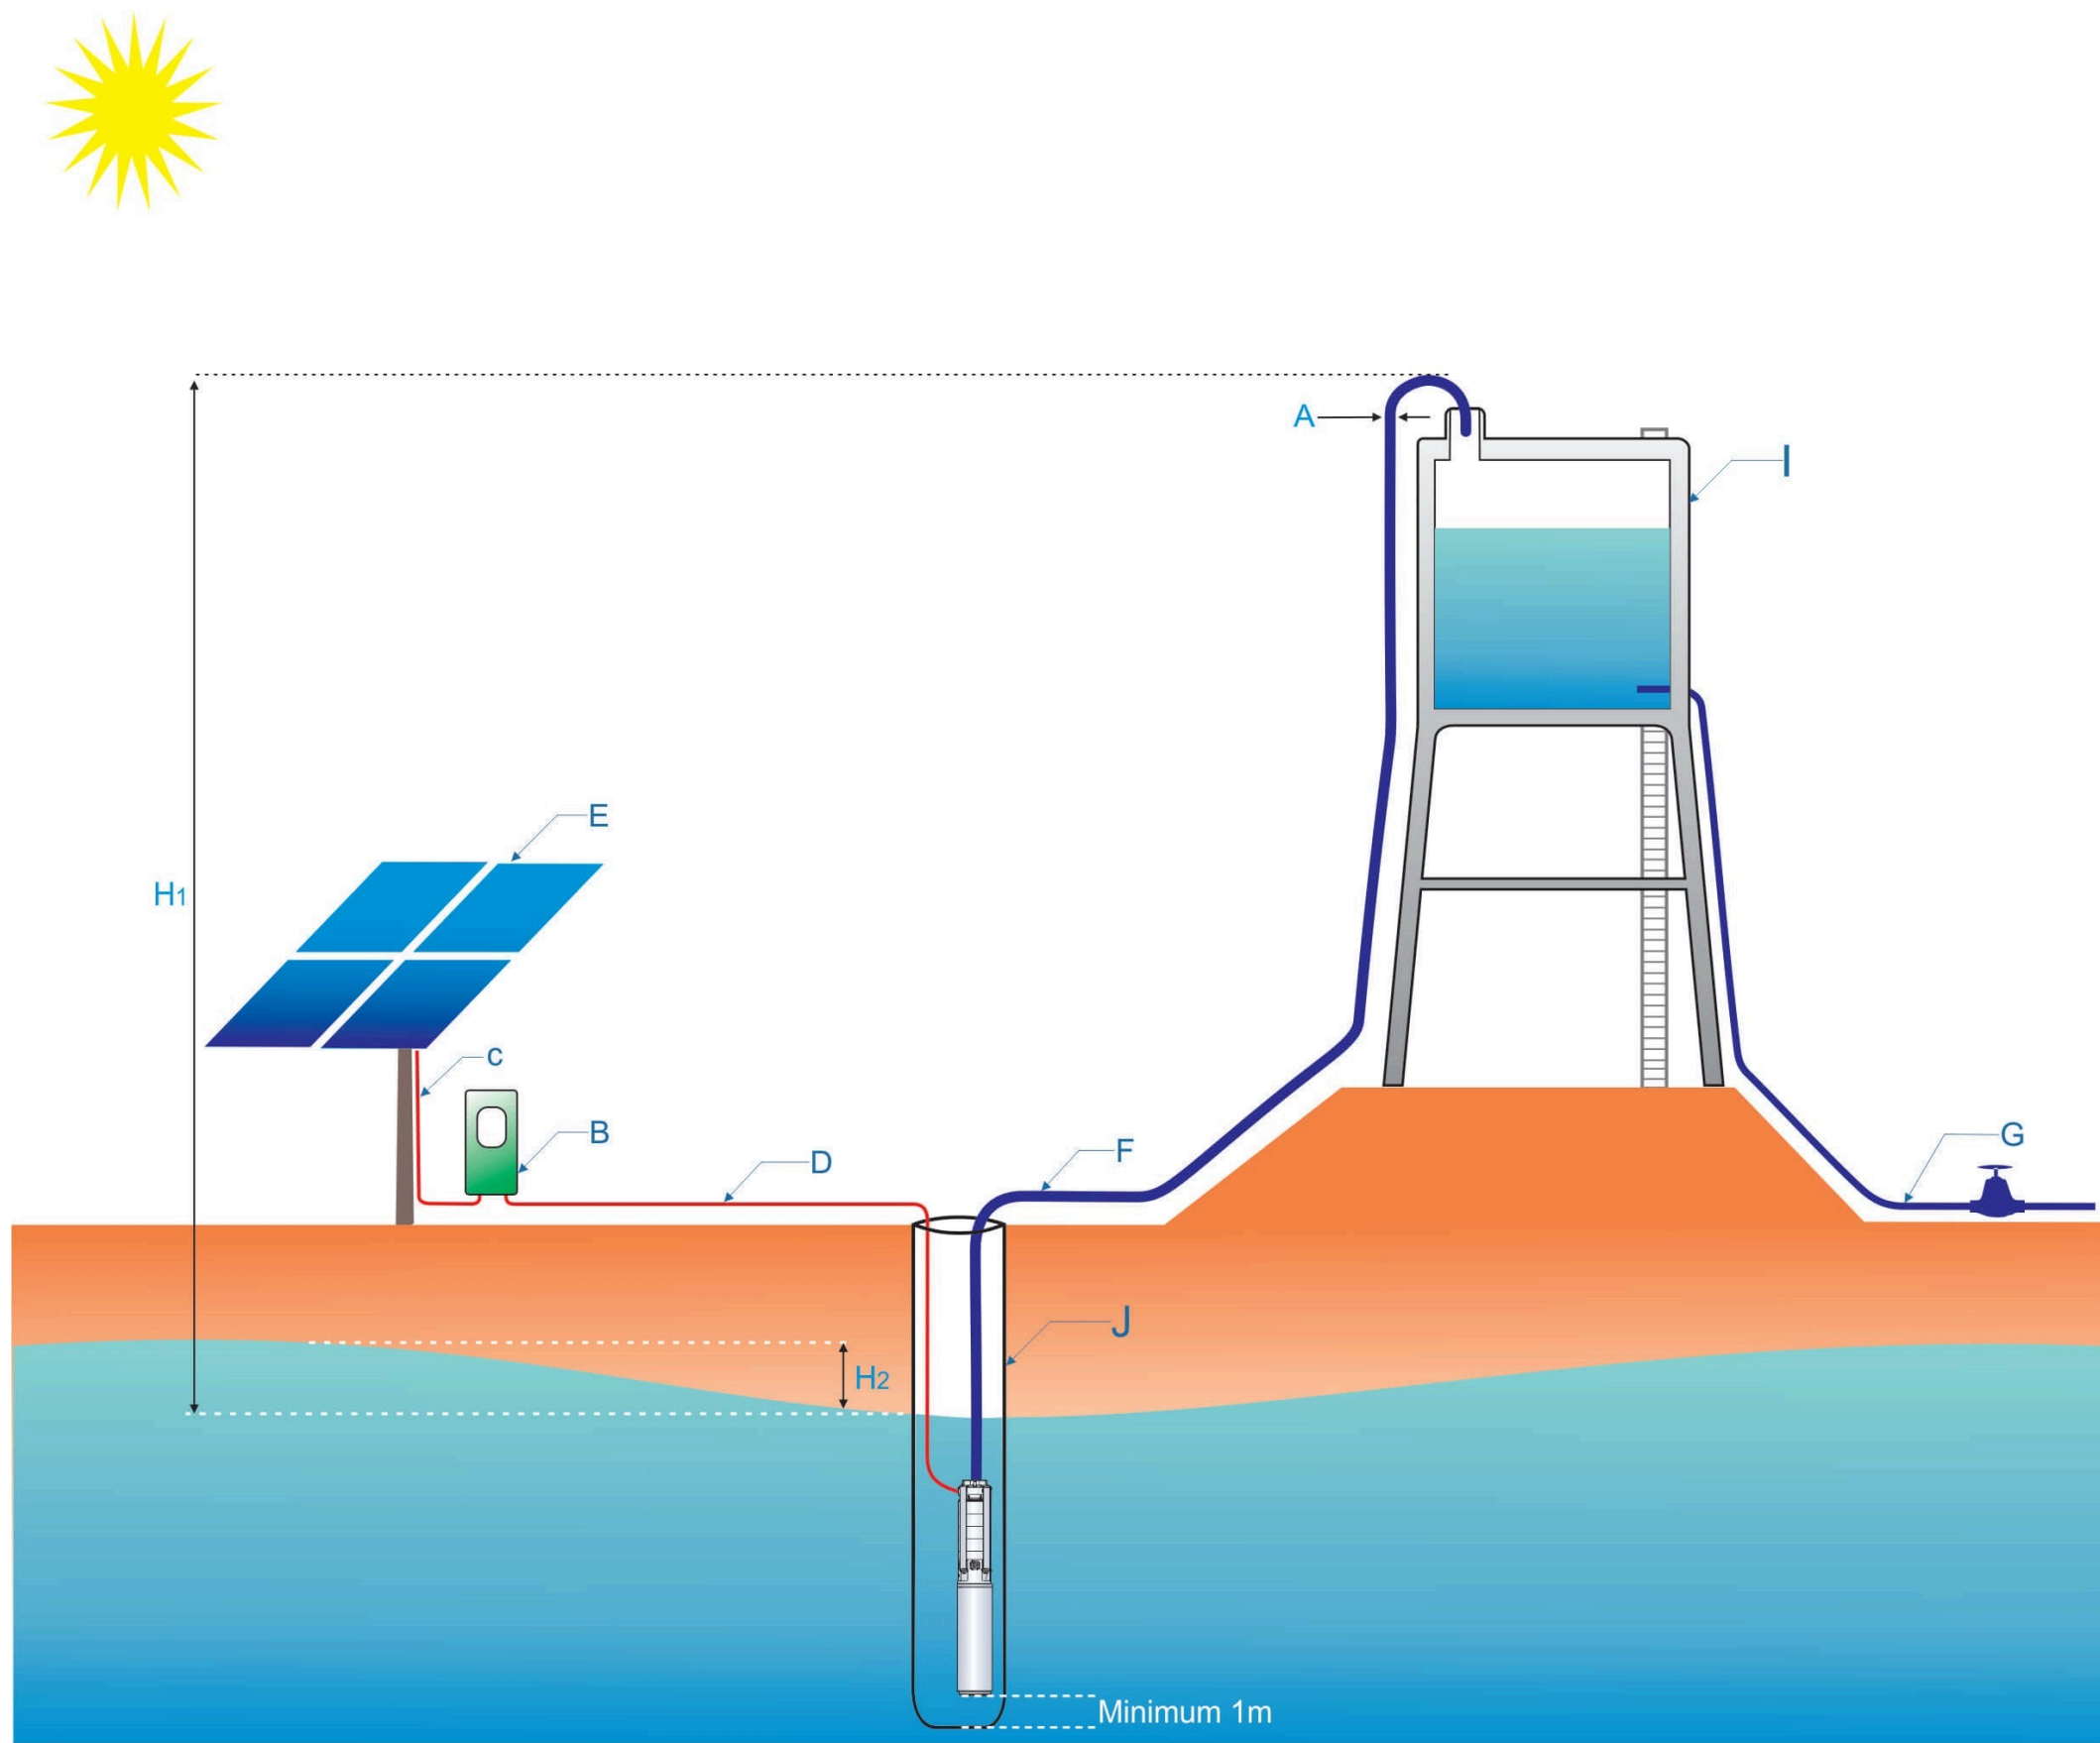

- A (pipe diameter) pipeline inner diameter.
- B (controller) solar pump controller to drive the pump.
- C (cable) the electrical cable between solar and controller.
- D (cable) the electrical cable between controller and pump.
- E (solar) solar panels stand.
- F (pipeline) pipeline from the pump outlet to the reservoir.
- G (pipeline) water tank outlet.
- H₁ (static head) virtical height from the lowest level to the highest point of delivery.
- H₂ (draw down) the dynamic water level of the well depending on the pump operation.